

## Product Description

The Commerce Bell Pendant is available in a Type V distribution with two lens options designed to replace HID lighting systems up to 250w MH or HPS. The fixture mounts to a pole single arm, pole double arm, or wall mount single arm. Typical area lighting applications include parking areas, walkways, and pedestrian public spaces. Mounting heights of 12 to 30 feet can be used based on light level and uniformity requirements.

> Quick Ship - In Stock, Ready to Ship

Project:		Type:
Location:		
Prepared By:		Date:
Comments:		


## Performance Summary

- Samsung 351B LEDs >115 Lm/W
- USA assembled product with 1-10V dimming
- Patented heat dissipation design for optimum efficiency
- National listing lab tested to IES standards with NEMA optics
- High lumen maintenance exceeds DOE requirements
- Photometric optic built over each LED for enhanced light distribution
- Clear prismatic or opal array lens to seal LED array
- Solid State with high-shock and vibration resistance
- Accommodates 3" tenons with wall mount, single pole, or dual pole options
- Aluminum LED boards with copper tracings for best thermal management
- LED array manufactured using a state-of-the-art SMT machine
- A360 extruded ingot sand cast housing
- DuPont architectural powdercoat black finish with custom RAL options
- Decorative spun aluminum shade with black powdercoat finish
- Separate ballast compartment for best heat management
- Integral heat-dissipating fins for thermal management
- Chromate conversion coating for long lasting appearance
- Rust resistant black oxide mounting hardware with durable nickel-plating
- Optional twist-lock receptacle and photocell is installed on arm brackets
- High CRI - RA>80 enhances original colors
- Contains no mercury, lead, infrared or UV radiation and cool to the touch
- Operating temperature: -40 to 40 degrees celsius
- Samsung chip platform with completed 6,000 hour LM-80 test
- 473,000 hour LED life @ L70 tested at 25 degrees celsius
- Certifications: CE, RoHS, CSA - IP66 sealed LED compartment
- 5 year system warranty

## COMMERCE BELL SERIES

Modern Cast Aluminum Pendant and Pole Options

LED Dimmable Luminaire

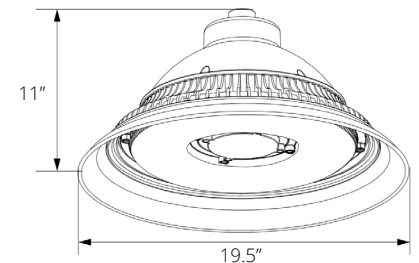

## Models:

- WDAS30Q1: 84W - 9614 Lm - Single Wall Mount Arm - B:3, U:3, G:0
- WDAS30Q2: 84W - 9614 Lm - Single Pole Mount Arm - B:3, U:3, G:0
- WDAS30Q3: 168W - 19228 Lm - Dual Pole Mount Arm - B:3, U:3, G:0

## Ordering Information:

Part Number:

\*Adder Applies    \*\*\*Photocell Not Available with Wall Mount    \*\*Adder Applies. Extended Lead Time Applies.

Ordering Example: WDPBQ2-4-S3-BK-ST-SP

Family	CCT	Optic	Housing Finish	Voltage	Accessories
WDAS30Q1 WDAS30Q2 WDAS30Q3	30 - 3000K** 40 - 4000K** 50 - 5000K	S51 - Type V Medium Clear Prismatic Lens  S52 - Type V Medium Opal Array Lens*	BK - Black CS - Custom*	UNV1 - 120-277V UNV2 - 347-480V*	SF - Single Fuse DF - Double Fuse SP - Surge Protection R3 - 3-Pin Twist Lock Receptacle 120-277 VAC R7 - 7-Pin Twist Lock Receptacle 347-480 VAC P31 - Twist Lock Non-Shorting Cap (Fixture Always Off) P32 - Twist Lock Shorting Cap (Fixture Always On) P42 - Instant Twist Lock Photocell 110-277 VAC*** P50 - Time Delay Twist Lock Photocell 120VAC*** P52 - Time Delay Twist Lock Photocell 277 VAC*** P45 - Straight Round Aluminum Pole 20' with 4" Base 3/4" Bolts P55 - Straight Round Aluminum Pole 25' with 5" Base 1" Bolts PC - Custom Pole Height



Vivid Leds, Inc.  
PO BOX 9  
Sellersburg, IN 47172  
800-974-3570  
www.vividleds.us

Dimensions, specifications, and product pictures are subject to change without notice.

A13