

# Alume SC Installation Instructions

## ⚠ CAUTIONS

### IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:





#### READ AND FOLLOW ALL SAFETY INSTRUCTIONS



1. To avoid the possibility of electrical shock, turn off power supply before installation or servicing.
2. This product must be wired in accordance with the National Electrical Code and applicable local codes and ordinances.
3. Proper grounding is required to ensure personal safety.

**SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE**

## No.1 Surface mounted installation

1. Drill four holes on the ceiling and fix the mounting plate on the ceiling by four tapping screws (see figure1)
2. Hook the housing on the mounting plate and then according to the right way to wiring(see figure2)
3. Moving the housing and hook the housing(see figure3)
4. Tighten the side fastening screws(see figure4)

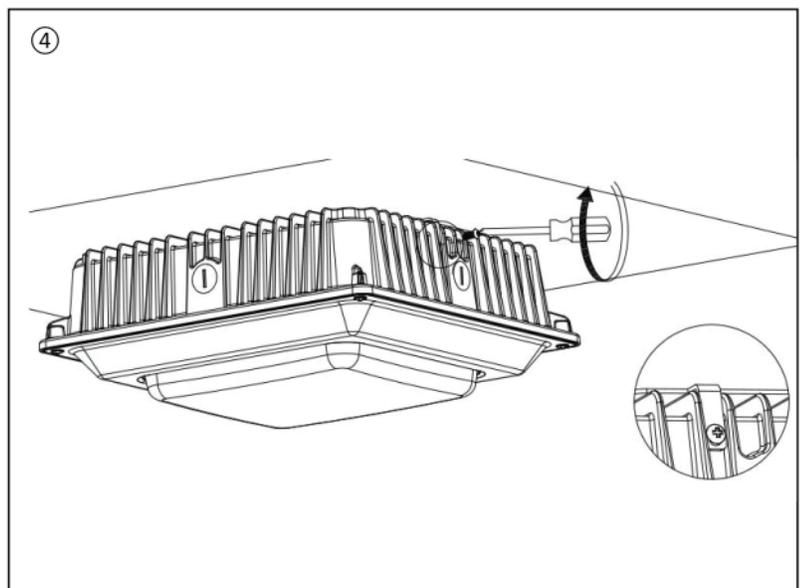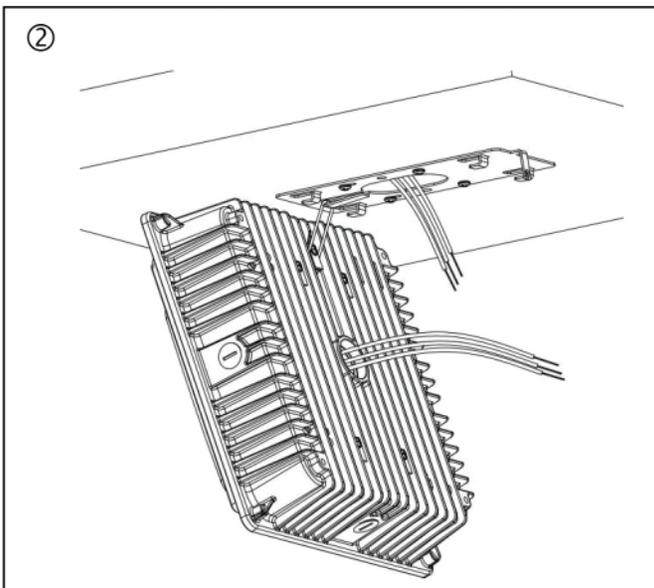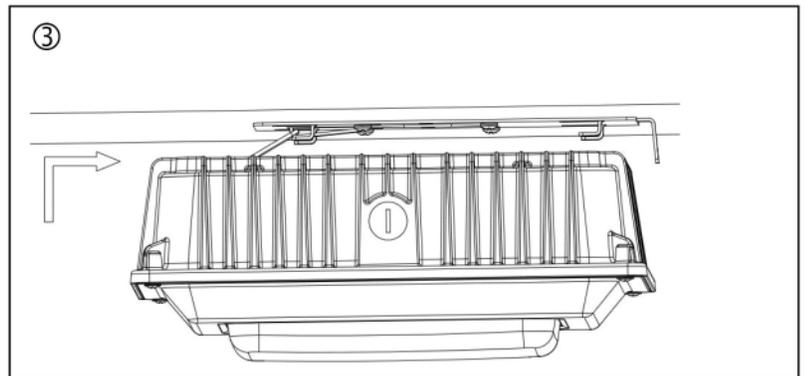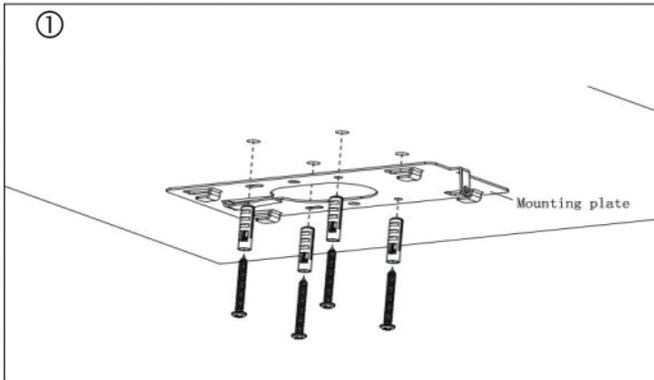

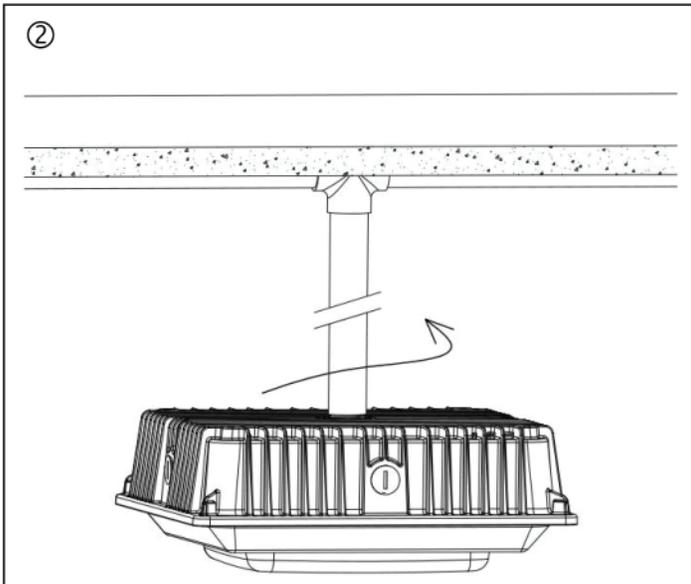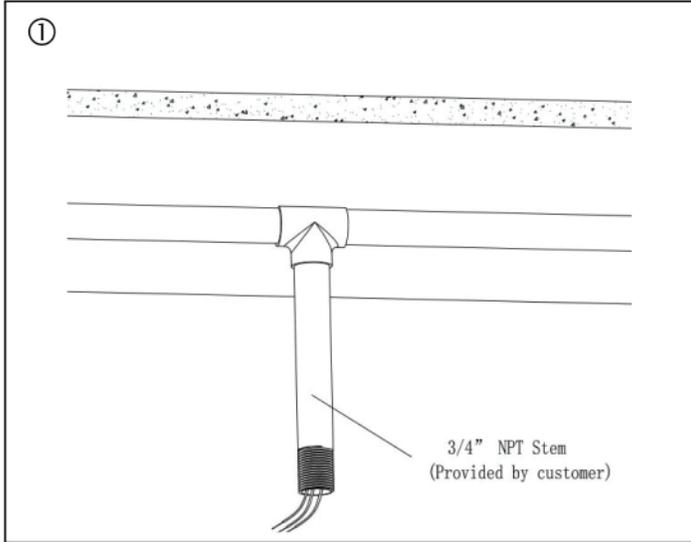

## No.2 MOUNTING USING 3/4"

1. According to the right way to wiring
2. The lamp lockwise precession to the 3/4" NPT Stem (see figure 2)

Note:

The housing must be selected in the 3/4" plug more than 12mm to make sure the safety.

### ELECTRICAL CONNECTIONS

#### STEP 1:

Make the following Electrical Connections to the terminal block:

- a. For 120/277V connect the black fixture lead to the voltage supply lead (Hot 1 for 208/240V wiring).
- b. For 120/277V connect the white fixture lead to the neutral supply lead. (Hot 2 for 208/240V wiring).
- c. Connect the green or green/yellow ground lead to the green lead

	TERMINAL BLOCK		LUMINAIRE
LINE OR HOT 1	●	LINE-BLACK	
GREEN	●	GROUND-GREEN	
NEUTRAL OR HOT 2	●	NEUTRAL-WHITE	