

IRIS PRO SPORTS LIGHT

INSTALLATION INSTRUCTION

VVDSPPRO1 400W - 600W Pages 1-4

VVDSPPRO2 600W-800W Pages 5-8


VVDSPPRO3 800W-1200W Pages 5-8

For driver EUM-680S350MG/Pour le pilote

EUM-680S350MG, Notice: This control circuit is not isolated – see installation instructions

Remarque : Ce circuit de commande n'est pas isolé. Voir les instructions d'installation

- 1.The voltage of the dimming circuit is 10V maximum
- 2.The manufacturer's recommendation to assure a cumulative leakage current of less than 3.5mA on the control circuit.
- 3.Sensor must meet UL773A standard, Dimmer must meet UL1472 standard, can be used with Non-isolation dimmable driver.

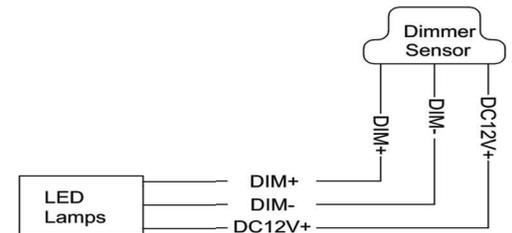

This specification does not provide full details of the lighting fixtures or possible differences from the actual products, and all possible contingencies associated with installation, use and maintenance, Please contact us for more details or for special problems other than those listed in this manual.

1. Summary

This luminaire is used for outdoor lighting and shall not be used in closed areas with difficult ventilation or high temperature. Best results will be achieved if installed or maintained in accordance with the following recommended methods. The manufacturer has done their best to ensure the safety use or risk-free operation of the product in design and production, provided that the user operates correctly, as well as the symbol accident prevention law (Safe production law) requirements. Users should ensure that the person handling, using and selling the product is fully informed of the information provided by the manufacturer and that they are clearly aware of the necessary security measures.

2. Disassembly

In order to avoid any damage case in transportation, please check the luminaires and accessories carefully to ensure there is no damaged, ever we designed a reliable packing. Please don't install the damaged luminaires and accessories, the full product family shall at least include:

- (1) Luminaire;
- (2) Mounting arm;
- (3) Installation Instructions;

3. Take attention matters

Please follow the instructions below to use this product, it's a kind of outdoor lighting suitable for highway main or trunk roads, secondary roads, commercial squares, industrial areas, residential areas, parking lots and other outdoor places. Installation height: 3-50m. Diameter of mounting . Adjustable angle: 0°, 10° or 15° (horizontal or vertical).

4. Important safety information

CAUTION: Risk of Electric Shock

1. Suitable for damp location.
2. Use in -40~55 degrees environmental conditions.
3. For using with light dimmers, continuous dimming, adjustable to 10% less luminous flux.

5. Read all instructions before installation.

1. This product must be installed in accordance with the application code by a qualified person.
2. Risk of electric shock. Ensure that main power source is off when wiring or soldering the sections of the product.

3. Before installing the product or doing any maintenance, make sure to turn off the power supply at the circuit breaker or fuse box.

4. Check to make sure that all fixture connections have been properly made and the fixture is grounded to avoid potential electrical shocks.


5. All the dimming circuits are insulated from the output circuit by at least basic insulation in the approved LED drivers. All the dimming circuits are insulated from the LV supply by double/reinforce insulation.

6. If the external cord is broken, it shall be exclusively replaced by our service agent or a similar qualified person in order to avoid a hazard

7.  The light source contained in this luminaire shall only be replaced by our service agent or a similar qualified person


8.  Do not dispose of electrical appliances as unsorted municipal waste, use separate collection facilities. Contact your local government for information regarding the collection systems available. If electrical appliances are disposed of in landfills or dumps, hazardous substances can leak into the groundwater and get into the food chain, damaging your health and well-being.

1

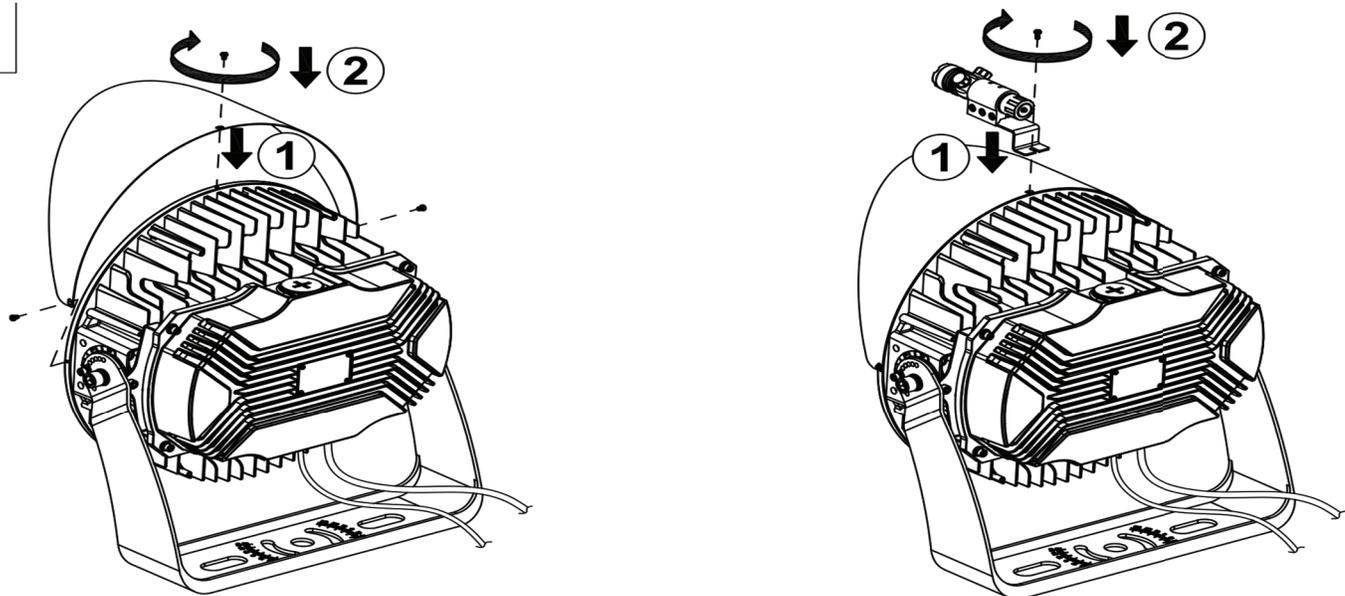


Take the Visor from the box, align the mounting holes with the luminaire.
Take the Screw, fit visor (M4 screw Torque Values 2.5 N.m)

2

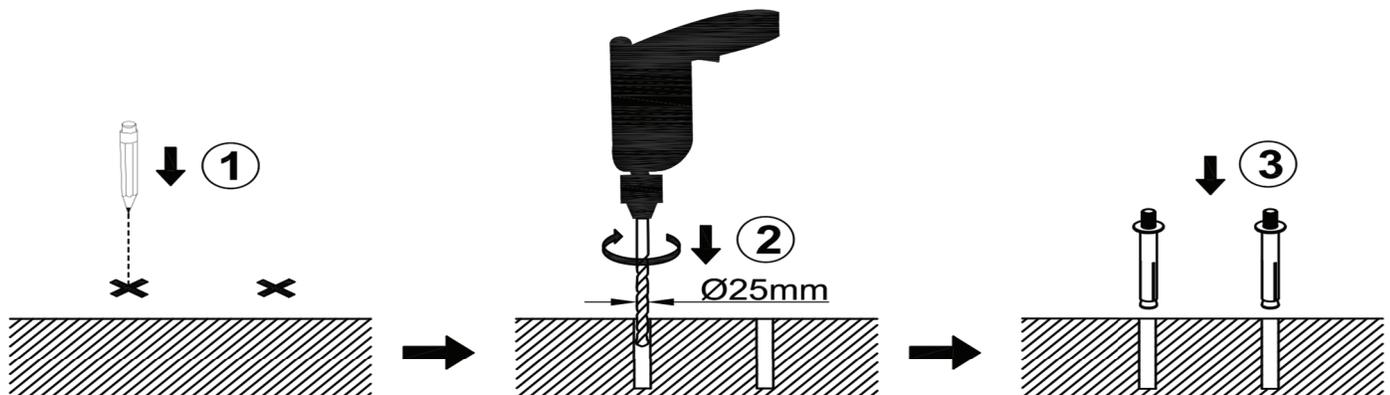

Drill holes at the marked points with a 25mm diameter electric drill bit.
Insert the M20 explosive bolt into the hole

3

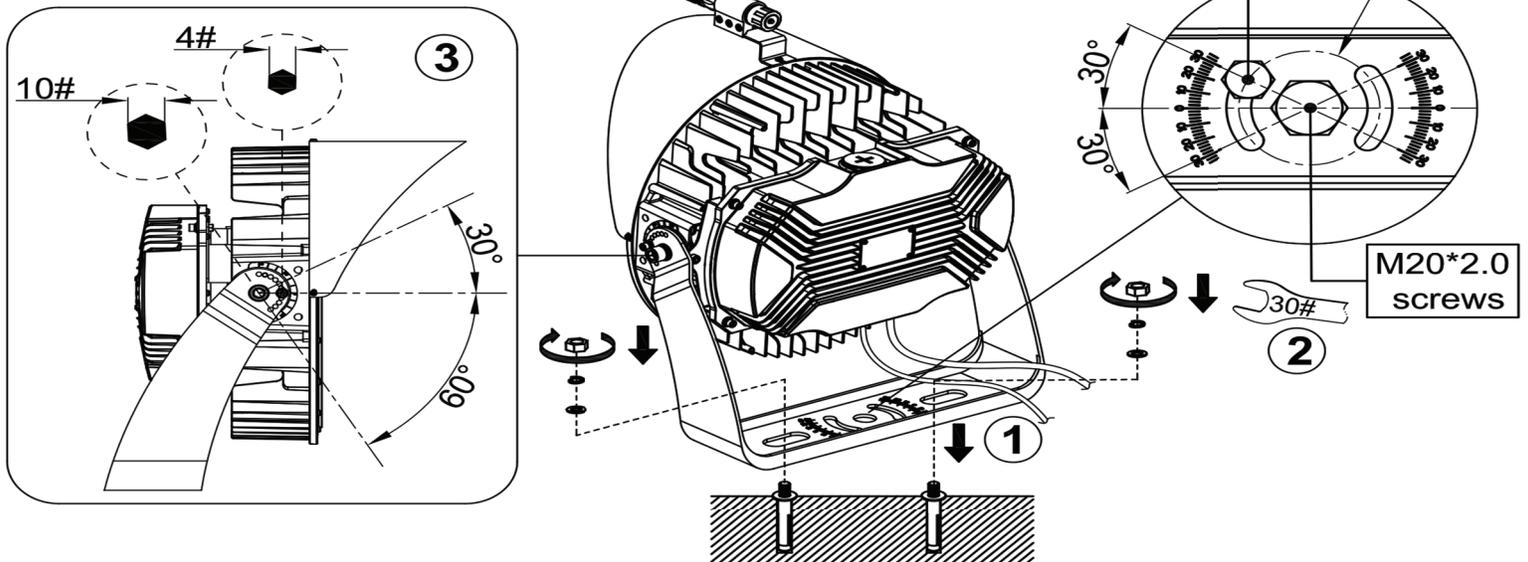

Secure the lamp body to the mounting bracket or mounting surface with the M20 nut and lock the nut. You can use 10 # and 4 # hexagonal spanner to loosen the screws at both ends, adjust the light body irradiation angle (0 ~ 30 degrees and 0 ~ -60 degrees). Secure the middle arc-shaped hole of the bracket with two M12 bolts, allowing the lamp body angle to be adjusted left and right by 30 degrees on each side.


⚠ WARNING

RISK OF FIRE, ELECTRIC SHOCK OR PERSONAL INJURY


Before installation, turn power off.



4

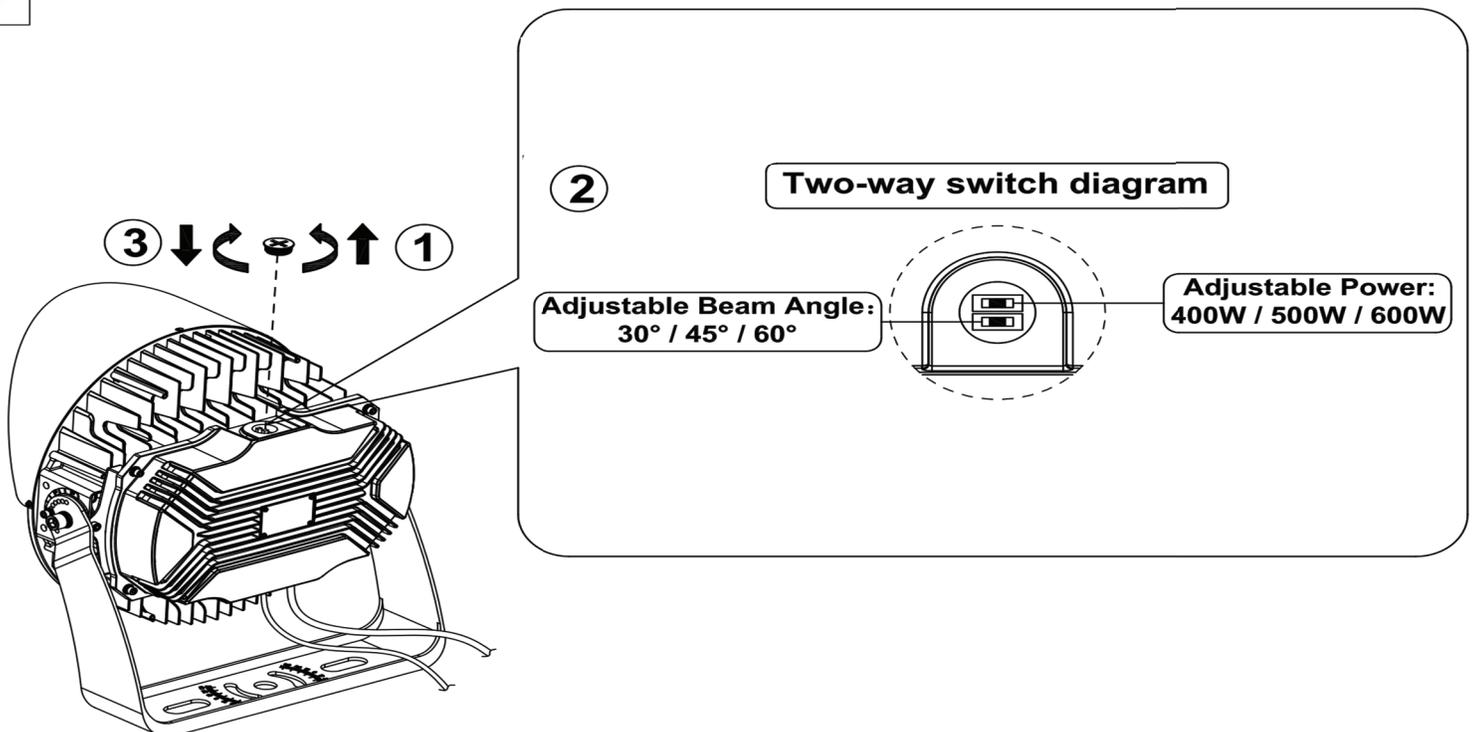

Use a screwdriver to loosen the switch cover. Adjust the light's power and beam angle as needed. After adjustment, reinstall the switch cover and tighten it with a screwdriver. **(Note: All adjustments must be performed with the power off. Live operation is strictly prohibited.)**

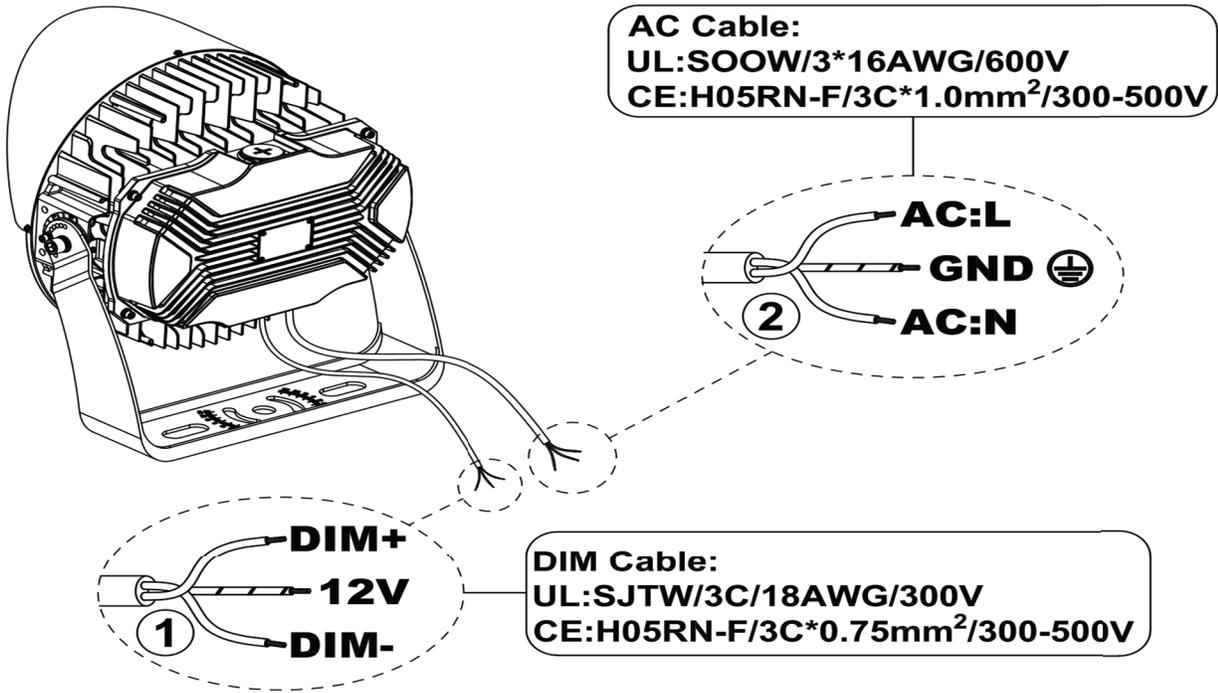

Make all necessary wiring and observe the correct voltage and polarity. Make sure that the electric lines are seated correctly and clamped.


IRIS PRO SPORTS LIGHT

Installation instructions and use manual

For driver EUM-680S350MG/Pour le pilote
EUM-680S350MG, Notice: This control circuit is not isolated – see
installation instructions

Remarque : Ce circuit de commande n'est pas isolé. Voir les
instructions d'installation

1. The voltage of the dimming circuit is 10V maximum
2. The manufacturer's recommendation to assure a cumulative leakage current of less than 3.5mA on the control circuit.
3. Sensor must meet UL773A standard, Dimmer must meet UL1472 standard, can be used with Non-isolation dimmable driver.

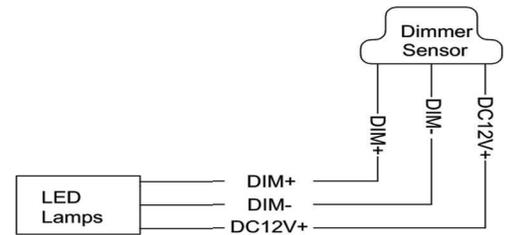

This specification does not provide full details of the lighting fixtures or possible differences from the actual products, and all possible contingencies associated with installation, use and maintenance, Please contact us for more details or for special problems other than those listed in this manual.

1. Summary

This luminaire is used for outdoor lighting and shall not be used in closed areas with difficult ventilation or high temperature. Best results will be achieved if installed or maintained in accordance with the following recommended methods. The manufacturer has done their best to ensure the safety use or risk-free operation of the product in design and production, provided that the user operates correctly, as well as the symbol accident prevention law (Safe production law) requirements. Users should ensure that the person handling, using and selling the product is fully informed of the information provided by the manufacturer and that they are clearly aware of the necessary security measures.

2. Disassembly

In order to avoid any damage case in transportation, please check the luminaire and accessories carefully to ensure there is no damaged, ever we designed a reliable packing. Please don't install the damaged luminaire and accessories, the full product family shall at least include:

- (1) Luminaire;
- (2) Mounting arm;
- (3) Installation Instructions;

3. Take attention matters

Please follow the instructions below to use this product, it's a kind of outdoor lighting suitable for highway main or trunk roads, secondary roads, commercial squares, industrial areas, residential areas, parking lots and other outdoor places. Installation height: 3-50m. Diameter of mounting . Adjustable angle: 0°, 10° or 15° (horizontal or vertical).

4. Important safety information

CAUTION: Risk of Electric Shock

1. Suitable for damp location.
2. Use in -40~55 degrees environmental conditions.
3. For using with light dimmers, continuous dimming, adjustable to 10% less luminous flux.

5. Read all instructions before installation.

1. This product must be installed in accordance with the application code by a qualified person.
2. Risk of electric shock. Ensure that main power source is off when wiring or soldering the sections of the product.

3. Before installing the product or doing any maintenance, make sure to turn off the power supply at the circuit breaker or fuse box.



4. Check to make sure that all fixture connections have been properly made and the fixture is grounded to avoid potential electrical shocks.

5. All the dimming circuits are insulated from the output circuit by at least basic insulation in the approved LED drivers. All the dimming circuits are insulated from the LV supply by double/reinforce insulation.




6. If the external cord is broken, it shall be exclusively replaced by our service agent or a similar qualified person in order to avoid a hazard

7.  The light source contained in this luminaire shall only be replaced by our service agent or a similar qualified person

8.  Do not dispose of electrical appliances as unsorted municipal waste, use separate collection facilities. Contact your local government for information regarding the collection systems available. If electrical appliances are disposed of in landfills or dumps, hazardous substances can leak into the groundwater and get into the food chain, damaging your health and well-being.

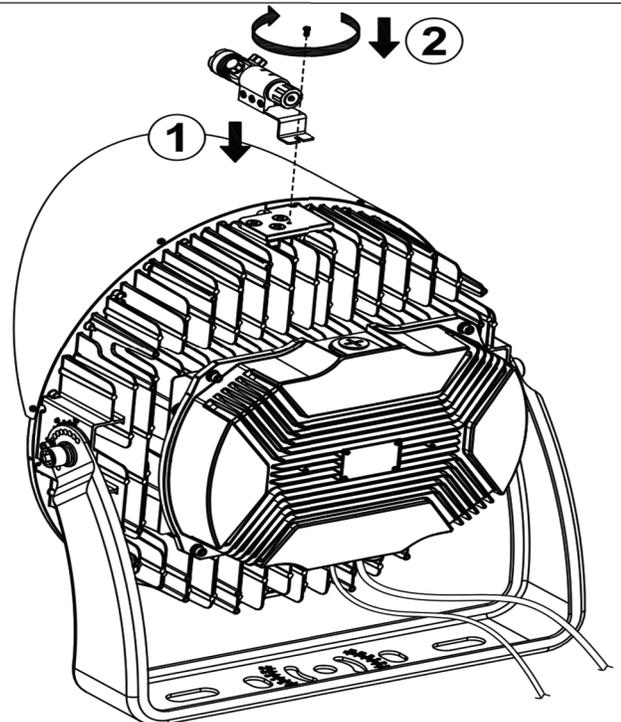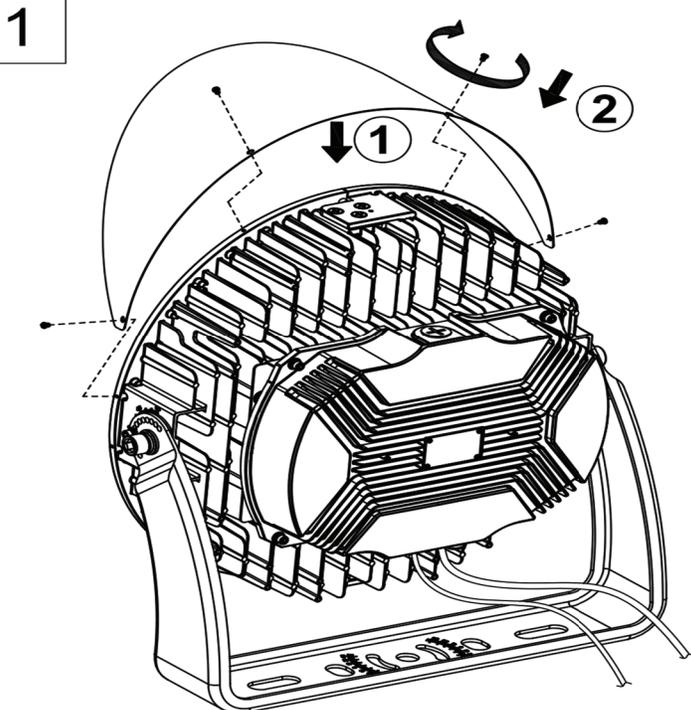


Take the Visor from the box, align the mounting holes with the luminaire. Take the Screw, fit visor.

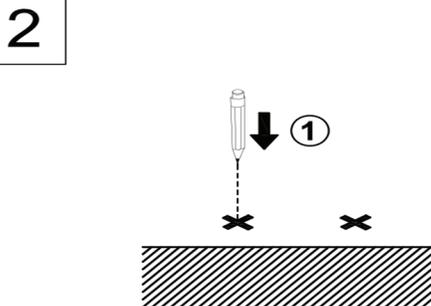

Drill holes at the marked points with a 25mm diameter electric drill bit. Insert the M20 explosive bolt into the hole.

3

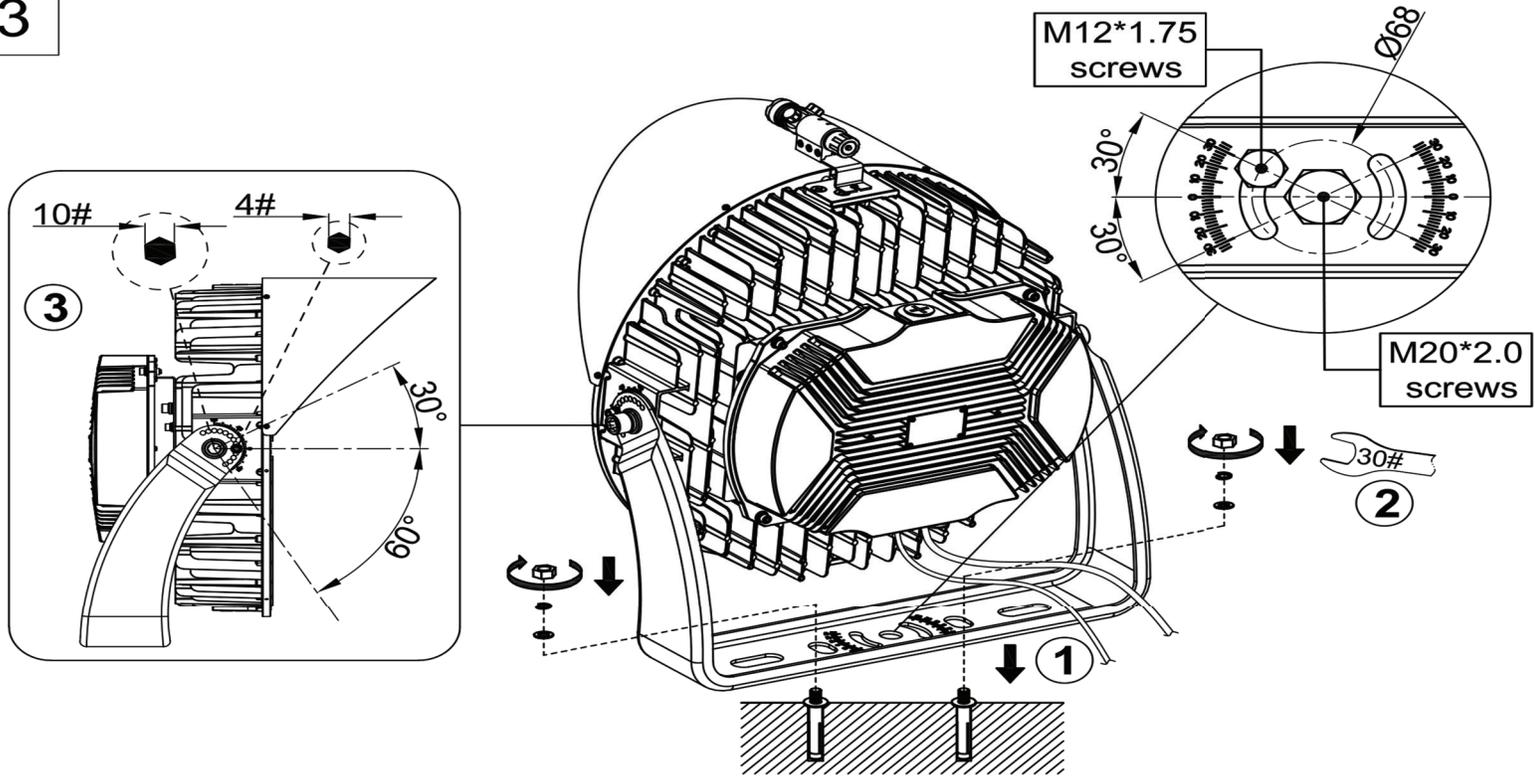

Secure the lamp body to the mounting bracket or mounting surface with the M20 nut and lock the nut. You can use 14 # and 5 # hexagonal spanner to loosen the screws at both ends, adjust the light body irradiation angle (0 ~ 30 degrees and 0 ~ -60 degrees). Secure the middle arc-shaped hole of the bracket with two M12 bolts, allowing the lamp body angle to be adjusted left and right by 30 degrees on each side.


WARNING

RISK OF FIRE, ELECTRIC SHOCK OR PERSONAL INJURY


Before installation, turn power off.



4

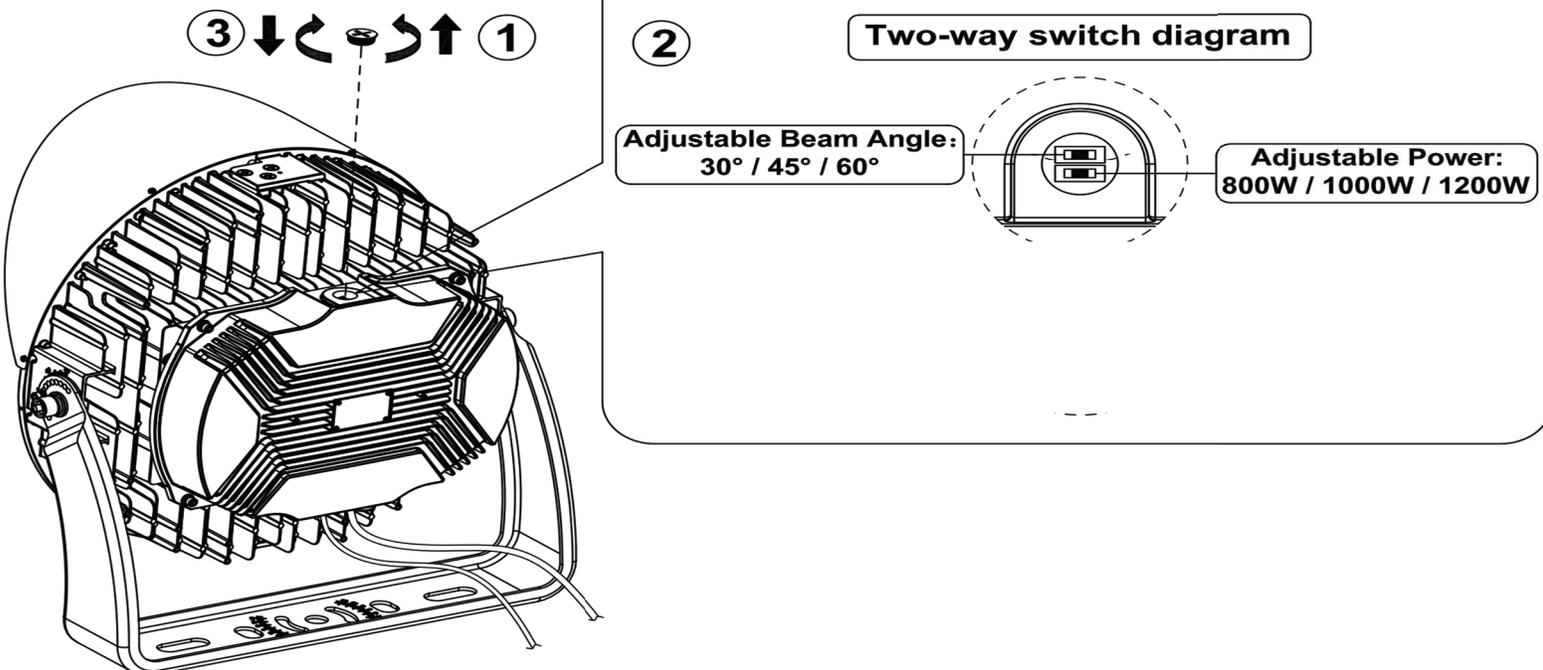

Use a screwdriver to loosen the switch cover. Adjust the light's power and beam angle as needed. After adjustment, reinstall the switch cover and tighten it with a screwdriver. **(Note: All adjustments must be performed with the power off. Live operation is strictly prohibited.)**

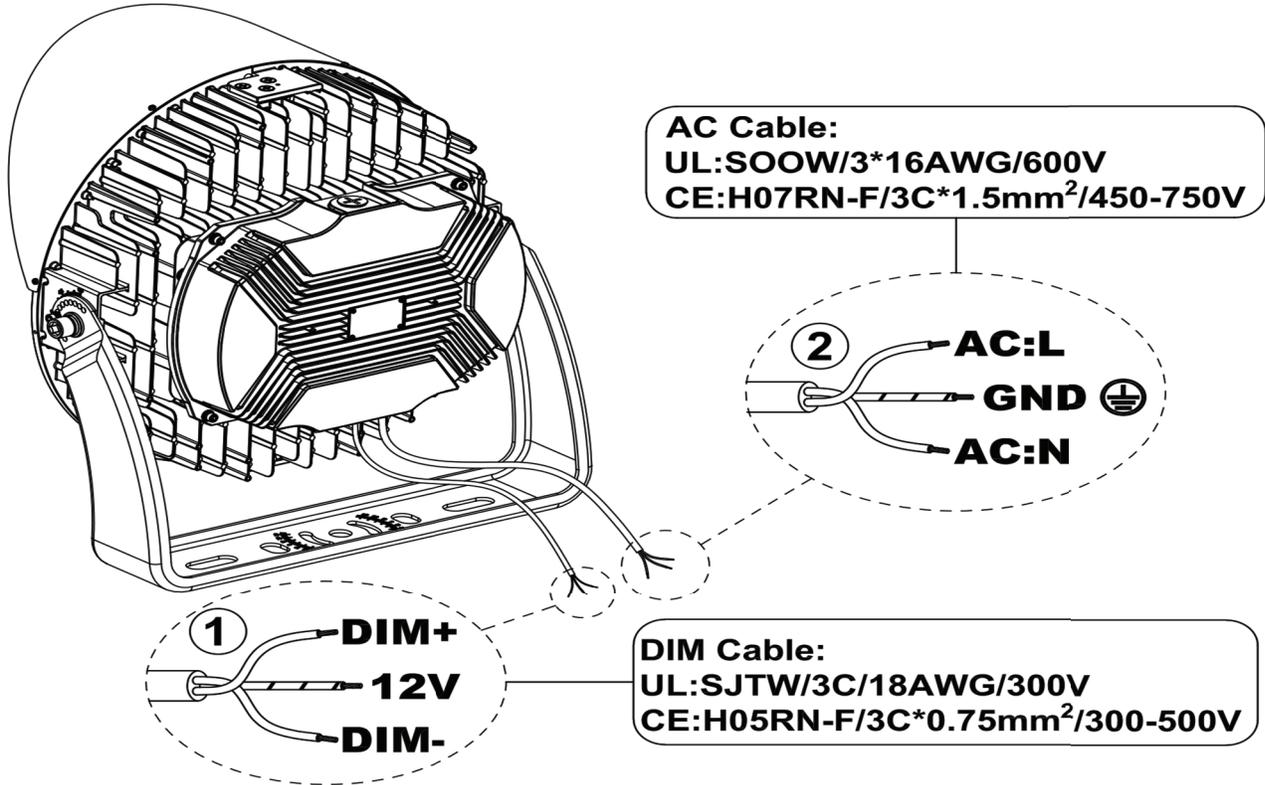

Make all necessary wiring and observe the correct voltage and polarity. Make sure that the electric lines are seated correctly and clamped.