

Product Description

This canopy has a slim and low profile design which provides safe and a visually appealing lighting experience. The luminaire can be mounted directly to the ceiling with a surface mount plate or junction box, for contractors to work safely and easily in confined spaces. It is a perfect solution to replace low output HID with a benefit of low maintenance cost.

> Quick Ship - In Stock, Ready to Ship


Project:		Type:
Location:		
Prepared By:		Date:
Comments:		

Performance Summary

- Nichia 3030 LEDs with high efficacy >125 Lm/W
- Type V IES 120 degree beam angle
- Great light output from a small housing footprint
- Standard design with modern components, excellent choice for retrofitting
- High lumen maintenance exceeds DOE requirements
- National listing lab tested to IES standards with Type V optic
- Solid State with high-shock and vibration resistance
- Corrosion resistant die-cast aluminum housing
- Architectural bronze UV resistant powder coat finish
- Cooling fin release for best heat dissipation
- Integrated one piece heatsink for better cooling
- Complete stainless steel bracket and hardware
- Impact resistant sandblasted polycarbonate prism lens
- Silicone rubber gasket - No leakage
- High reflectance aluminum reflector
- Contractor friendly quick mount plate for junction box, surface, or pendant
- Low Tj for long life and low lumen depreciation
- No infrared or UV radiation
- Contains no mercury or lead and cool to the touch
- Commercial CRI: RA>75
- Operating temperature: -35 to 45 degrees celsius
- IC controlled LED circuits
- 100,000 hour LED life
- IP65 rated for indoor or outdoor locations
- Certifications: CE, RoHS, cUL, UL, DLC
- 5 year system warranty

Carbon CP SERIES

Low Profile Rugged Housing with Mounting Plate
LED Dimmable Luminaire

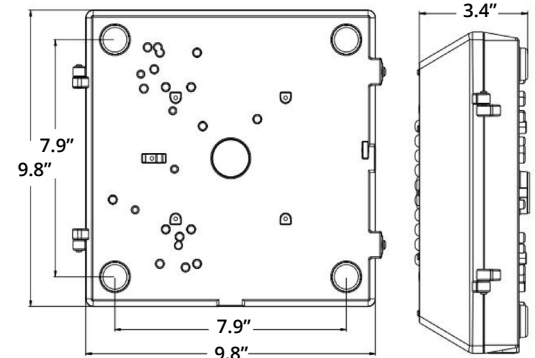

Models:

- WVD6CP20L: 20W - 2520 Lm - 6.4 Lbs - Non-Dimmable
- WVD6CP30L: 30W - 3780 Lm - 6.4 Lbs - Non-Dimmable
- WVD6CP40L: 40W - 5040 Lm - 6.4 Lbs - 0-10V Dimmable
- WVD6CP55L: 55W - 6552 Lm - 6.4 Lbs - 0-10V Dimmable
- WVD6CP80L: 80W - 10080 Lm - 6.4 Lbs - 0-10V Dimmable

Ordering Information:

Part Number:

Ordering Example: WVD6CP30L-50-S5-UNV-BZ-SM

Family	CCT	Optic	Voltage	Finish	Mounting
WVD6CP20L WVD6CP30L WVD6CP40L WVD6CP55L WVD6CP80L	50 - 5000K	S5 - Type V 120 Degree	UNV - 100-277V	BZ - Bronze	SM - Surface Mount JB - Junction Box PM - Pendant 3/4" Conduit



Vivid Leds, Inc.
PO BOX 9
Sellersburg, IN 47172
800-974-3570
www.vividleds.us

Dimensions, specifications, and product pictures are subject to change without notice.

C4