

## Product Description

The Industry series is a vaporproof fixture with a choice of mounting configurations designed to replace HID lighting systems up to 70w MH or HPS. This vapor resistant fixture can withstand extreme physical and environmental abuse and is ideal for retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting heights of 8 to 12 feet can be achieved.

> Quick Ship - In Stock, Ready to Ship


Project:		Type:
Location:		
Prepared By:		Date:
Comments:		

## Performance Summary

- Samsung LEDs with high efficacy >80 Lm/W
- USA assembled product with quick warranty support
- Standard design with modern components
- Patented heat dissipation design for optimum efficiency
- National listing lab tested to IES standards with Type V optic
- High lumen maintenance exceeds DOE requirements
- Photometric optic built over each LED for enhanced light distribution
- Solid State with high-shock and vibration resistance
- Aluminum LED boards with copper tracings for best thermal management
- LED array manufactured using a state-of-the-art SMT machine
- Clear heat treated glass globe with diffused option
- A360 extruded ingot die-cast housing and screw on guard with 3/4" NPS
- Repaintable DuPont textured gray architectural powdercoat finish
- Chromate conversion coating for long lasting appearance
- Multiple mounting options for pendant, electrical box or wall mount
- Includes weatherproof box with coin plugs
- Rust resistant stainless steel hardware with durable nickel-plating
- High CRI - RA>82 enhances original colors
- 1-10V dimmable driver with surge protection
- Fast turn on with no warm up or cold start issues
- Contains no mercury, lead, infrared or UV radiation and cool to the touch
- Operating temperature: -40 to 40 degrees celsius
- Samsung chip platform with completed 6,000 hour LM-80 test
- 135,000 hour LED life @ L70 tested at 105 degrees celsius
- Certifications: CE, RoHS, CSA - IP65 outdoor rated
- 5 year system warranty


## INDUSTRY VP SERIES

Vaporproof Jelly Jar with Multiple Mounting Options  
LED Dimmable Luminaire

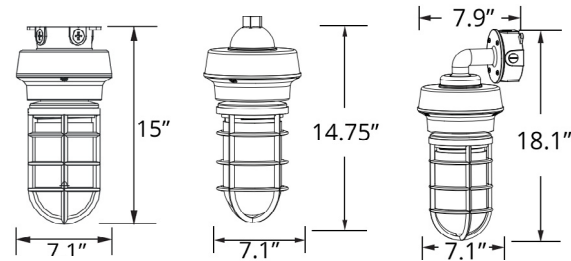

## Models:

- WDVb43Q: 10W - 836 Lm - 525mA - B:0, U:2, G:0 - Electrical Box Mount
- WDVp43Q: 10W - 836 Lm - 525mA - B:0, U:2, G:0 - 3/4" NPS Threaded Pendant Mount
- WDVw43Q: 10W - 836 Lm - 525mA - B:0, U:2, G:0 - Wall Mount

Ordering Information:				Part Number:		
*Adder Applies		**Adder Applies. Extended Lead Time May Apply.		Ordering Example: WDVb43Q-50-55C-V27-GR-ND		
Family	CCT	Optic	Voltage	Finish	Dimming	Accessories*
WDVB43Q WDVP43Q WDVW43Q	30 - 3000K** 40 - 4000K** 50 - 5000K 1 - 590nm*	55C - Type V Short 115 Degree	V27 - 120-277V	GR - Gray CS - Custom*	ND - Non Dim DM - 0-10V Dim	SEE NEXT PAGE
						



Vivid Leds, Inc.  
PO BOX 9  
Sellersburg, IN 47172  
800-974-3570  
www.vividleds.us

Dimensions, specifications, and product pictures are subject to change without notice.

D29

## Accessories:

- SF - Single Fuse
- DF - Double Fuse
- VS30A - Angled Stamped Aluminum Shade - Repaintable Gray
- VS30S - Straight Stamped Aluminum Shade - Repaintable Gray
- VG30F - Diffused Glass Globe
- SPR - Round Swivel Pendant Mount Fits 3/4" Conduit
- SPS - Square Swivel Pendant Mount Fits 3/4" Conduit
- PRB - Swivel Mount Reducer Bushing 3/4" to 1/2"
- PRB1 - Diecast Round Electrical Box with Five 1/2" Coin Plugs
- RC1 - Backplate with 1/2" Coin Plugs
- PRB3 - Diecast Round Electrical Box with Five 3/4" Coin Plugs



V30A



V30S



PRB



PRB1



RC1



PRB3



SPR



SPS



Vivid Leds, Inc.  
PO BOX 9  
Sellersburg, IN 47172  
800-974-3570  
www.vividleds.us

Dimensions, specifications, and product pictures are subject to change without notice.

The product on this page is a manufactured to order, non-stocking item. This product cannot be returned for refund or credit.

D29

Revised 3.25.18