

Product Description

This wall pack has a slim and low profile design which provides safe and a visually appealing lighting experience. The luminaire can be mounted directly to the wall with a mounting plate for contractors to work safely and easily in confined spaces. It is a perfect solution to replace high output HID with a benefit of low maintenance cost.

> Quick Ship - In Stock, Ready to Ship


Project:		Type:
Location:		
Prepared By:		Date:
Comments:		

Performance Summary

- Nichia LEDs with high efficacy >130 Lm/W
- Type V IES 120 degree beam angle
- Great light output from a small housing footprint
- National listing lab tested to IES standards with Type V optic
- Standard design with modern components, excellent choice for retrofitting
- Patented heat dissipation design for optimum efficiency
- Cooling fin release for best heat dissipation
- High lumen maintenance exceeds DOE requirements
- Solid State with high-shock and vibration resistance
- Corrosion resistant die-cast aluminum housing
- Architectural bronze UV resistant powder coat finish
- Integrated one piece heatsink for better cooling
- Contractor friendly mounting plate
- Impact resistant UV resistant polycarbonate cover
- Silicone rubber gasket - No leakage
- High reflectance aluminum reflector
- Low Tj for long life and low lumen depreciation
- Fast turn on with no warm up or cold start issues
- Contains no mercury, lead, infrared or UV radiation and cool to the touch
- Commercial CRI: RA>75
- Operating temperature: -35 to 55 degrees celsius
- IC controlled LED circuits
- 100,000 hour LED life
- IP65 rated for indoor or outdoor locations
- Certifications: CE, RoHS, cUL, UL
- 5 year system warranty

CARBON WP SERIES

UV Resistant Polycarbonate Lens Wall Pack
LED Luminaire

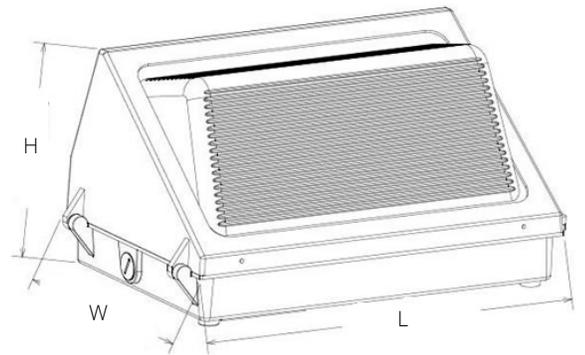

Models:

- VVD4WP40L50: 40W - 5233 Lm - 13.1" (L) x 9.5" (W) x 7.5" (H)
- VVD4WP60L50: 60W - 7928 Lm - 13.1" (L) x 9.5" (W) x 7.5" (H)
- VVD4WP80L50: 80W - 11065 Lm - 18.5" (L) x 9.5" (W) x 9" (H)

Ordering Information:

Part Number:

Ordering Example: VVD4WP100L50-50-S5-V27-BZ-SM

Family	CCT	Optic	Voltage	Finish	Mounting
VVD4WP40L50 VVD4WP60L50 VVD4WP80L50	50 - 5000K	S5 - Type V 120 Degree	V27 - 100-277V	BZ - Bronze	SM - Surface Mount



Vivid Leds, Inc.
PO BOX 9
Sellersburg, IN 47172
800-974-3570
www.vividleds.us

Dimensions, specifications, and product pictures are subject to change without notice.