

Product Description

The Decora HB high bay/low bay features a low profile, slim design in a compact, light-weight package. With a high performance heat sink, exceptional lumen maintenance, and a rock solid housing, the Decora will last for many years to come. With lumen packages ranging in comparison from 400W to 1000W HID, a variety of color temperatures and optics, this luminaire can be used in many different applications.

> Standard Ship Product - 30 Day Lead Time



Project:		Type:
Location:		
Prepared By:		Date:
Comments:		

Performance Summary

- Philips Lumileds Luxeon 3030 2D LEDs with high efficacy up to 133 Lm/W
- Unique appearance with innovative heatsink design
- National listing lab tested with Type V 120 degree distribution
- Integrated Meanwell power supply - field replaceable
- Polycarbonate clear lens for durability and clarity
- Designed for harsh temperature and high humidity
- Solid state with high shock and vibration resistance
- Resistant to impact and seismic activities
- Instant on and off without delay or re-strike
- Industrial die cast anodized aluminum fixture housing
- Smooth black polyester powdercoat finish with stainless hardware
- Excellent resistance to corrosion, UV degradation and abrasion
- Integrated eyelet for hook mount or suspension installation
- Optional adjustable surface mount yoke bracket
- 1 foot attached power cord whip extended through waterproof grommet
- High CRI - RA>80 enhances original colors
- 1/9th micro color binning enables tight color control
- Hot color targeting ensures color is within ANSI bin compliance
- No lead, mercury, UV or IR radiation
- Short circuit, over current, over voltage, over temp protection
- Low Tj for best lumen depreciation and extended life span
- Operating temperature: -40 to 55 degrees celsius
- IP66 washdown rated for indoor or outdoor applications
- Over 100,000 hour LED life
- Certifications: CE, RoHS, SAA, TUV, UL, DLC
- 5 year system warranty

DECORA HB SERIES

Affordable Solution with Multiple Mounting Options
Low Profile Dimmable LED Luminaire

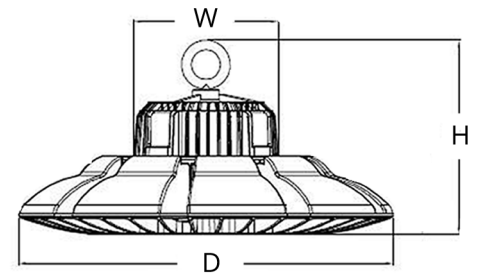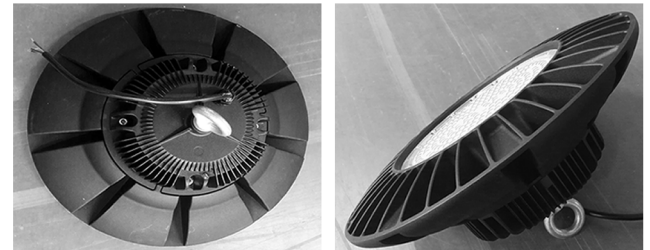

Models:

- VDAKR100: 100W - 13302 Lm - 11.8"(D) x 7.6"(H) x 5.1"(W) - 9.3 Lbs
- VDAKR150: 150W - 19931 Lm - 15"(D) x 8.1"(H) x 6"(W) - 15 Lbs
- VDARK200: 200W - 25096 Lm - 15"(D) x 8.1"(H) x 6"(W) - 16.5 Lbs

Ordering Information:				Part Number:			
*Adder Applies				Ordering Example: VDAKR100-50-T53-UNV-BK-ND-HK			
Family	CCT	Optic	Voltage	Finish	Dimming	Mounting	Accessories*
VDAKR100 VDAKR150 VDAKR200	30 - 3000K 40 - 4000K 50 - 5000K 57 - 5700K 65 - 6500K	T51 - Type V 60 Degree Clear T53 - Type V 90 Degree Clear T53 - Type V 120 Degree Clear T54 - Type V 120 Degree Diffused	UNV1 - 100-277V UNV2 - 200-480V*	BK - Black	ND - No Dim DM - 1-10V* (UNV1 Only)	HK - Integrated Eyelet SB - Surface Bracket*	SC - Safety Cable PC3 - 3ft Power Cord Extension with IP68 Connector PC6 - 6ft Power Cord Extension with IP68 Connector PC10 - 10ft Power Cord Extension with IP68 Connector



Vivid Leds, Inc.
 PO BOX 9
 Sellersburg, IN 47172
 800-974-3570
 www.vividleds.us

Dimensions, specifications, and product pictures are subject to change without notice.



SB - Surface Bracket

E1

Revised 5.1.18