

Product Description

The Connect series is a unique indoor environment LED luminaire when a low profile surface mount fixture is needed. The Connect Dry series allows for connectivity between the fixtures to minimize power cords for a clean look. With mounting and wire connection hardware included, everything you need is in one complete package.

> Standard Ship - 30 Day Lead Time


Project:		Type:
Location:		
Prepared By:		Date:
Comments:		

Performance Summary

- Lumenmax 2835 LED with excellent efficacy >110 Lm/W
- Fixtures can connect together with included joint plug or 10" connect cable
- Mounting clips with hardware and 10" power cord whip included
- Male / Female joint plug for seamless light connection with no dark spot
- Up to 200W can be connected on one run
- TRIAC dimming option for enhanced control
- Solid state LED light source, instant start, long life
- National listing lab tested with Type V 120 degree distribution
- Maximum lumen output with utilization of clear lens
- Smooth, non-glare and decorative with frosted lens
- Well distributed light using a patented reflecting system
- Effectively illuminates ambient light with superior foot candles
- Patented design with 0.8mm aluminum housing with excellent heat dissipation
- Durable casing with high purity AL6063 aluminum heatsink
- High quality Polystyrene cover with strong capacity
- Delicate shape, lightweight, easy installation
- Quick clip on surface mount, magnet mount or suspension kit options
- Universal 100-277V integral driver with surge protection
- Silent operation, no noise, no flickering
- No infrared or UV radiation
- Contains no mercury or lead and cool to the touch
- Excellent CRI RA>82 for color enhancement
- Power factor: >0.90, THD<20%
- Operating temperature: -25 to 50 degrees celsius
- 100,000 hour LED lamp life
- Certifications: CE, RoHS, TUV, SAA, ETL, DLC - IP40
- 3 year system warranty

CONNECT DRY LPL SERIES

Linear Fixtures Connect in a Series
Dimmable LED Indoor Luminaire

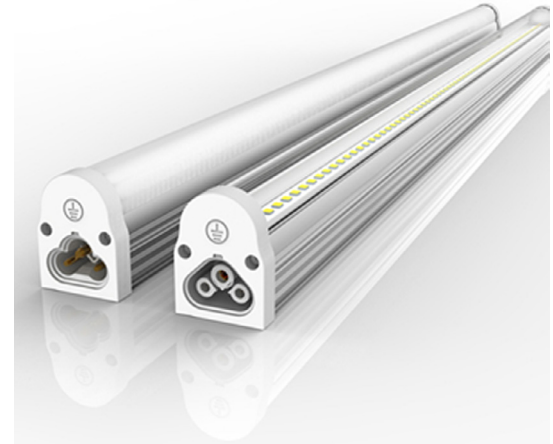

Quick and Easy Installation

Two mounting clips with screws included with each unit

Power cord and linkable cord included with each unit



Models:

- VDT5DL0600: 2' - 7W - 770 Lm - 22.5"(L) x 1.1"(W) x 1.5"(H)**
- VDT5DL0900: 3' - 12W - 1320 Lm - 34.6"(L) x 1.1"(W) x 1.5"(H)**
- VDT5DL1200: 4' - 15W - 1650 Lm - 46.5"(L) x 1.1"(W) x 1.5"(H)**
- VDT5DL1500: 5' - 20W - 2200 Lm - 58.4"(L) x 1.1"(W) x 1.5"(H)
- VDT5DL1800: 6' - 22W - 2420 Lm - 68.8"(L) x 1.1"(W) x 1.5"(H)
- VDT5DL2400: 8' - 30W - 3300 Lm - 92.8"(L) x 1.1"(W) x 1.5"(H)



Ordering Information:			Part Number:			
*Adder Applies			**Available in select models only		Ordering Example: VDT5DL0600-30-CL-DM-10-10	
Family	CCT	Lens	Mounting	Connect Cord	Power Cord	Accessories*
VDT5DL0600	30 - 3000K	CL - Clear	SM - Surface Mount Clip	10 - 10 inch	10 - 10 inch whip	TR - TRIAC Dimming 120V Only**
VDT5DL0900	40 - 4000K	CS - Clear Striated	MC - Magnetic Clip*	40 - 40 inch*	40 - 40 inch whip*	OF - On/Off Switch
VDT5DL1200	50 - 5000K	FR - Frosted (Diffused)	SK1 - 40" Maximum Drop	80 - 80 Inch*	80 - 80 inch whip*	
VDT5DL1500	60 - 6000K		Adjustable Suspension Kit*		40P - 40 inch with plug*	
VDT5DL1800			SK2 - 80" Maximum Drop			
VDT5DL2400			Adjustable Suspension Kit*			



Vivid Leds, Inc.
PO BOX 9
Sellersburg, IN 47172
800-974-3570
www.vividleds.us

Dimensions, specifications, and product pictures are subject to change without notice.

F6