

Product Description

The Connect series is a unique indoor environment LED luminaire when a low profile surface mount fixture is needed. The Connect Dry series allows for connectivity between the fixtures to minimize power cords for a clean look. With mounting and wire connection hardware included, everything you need is in one complete package.

> Standard Ship - 30 Day Lead Time


| | | |
|--------------|--|-------|
| Project: | | Type: |
| Location: | | |
| Prepared By: | | Date: |
| Comments: | | |

Performance Summary

- Lumenmax 2835 LED with excellent efficacy >110 Lm/W
- Fixtures can connect together with included joint plug or 10" connect cable
- Mounting clips with hardware and 10" power cord whip included
- Male / Female joint plug for seamless light connection with no dark spot
- Up to 200W can be connected on one run
- TRIAC dimming option for enhanced control
- Solid state LED light source, instant start, long life
- National listing lab tested with Type V 120 degree distribution
- Maximum lumen output with utilization of clear lens
- Smooth, non-glare and decorative with frosted lens
- Well distributed light using a patented reflecting system
- Effectively illuminates ambient light with superior foot candles
- Patented design with 0.8mm aluminum housing with excellent heat dissipation
- Durable casing with high purity AL6063 aluminum heatsink
- High quality Polystyrene cover with strong capacity
- Delicate shape, lightweight, easy installation
- Quick clip on surface mount, magnet mount or suspension kit options
- Universal 100-277V integral driver with surge protection
- Silent operation, no noise, no flickering
- No infrared or UV radiation
- Contains no mercury or lead and cool to the touch
- Excellent CRI RA>82 for color enhancement
- Power factor: >0.90, THD<20%
- Operating temperature: -25 to 50 degrees celsius
- 100,000 hour LED lamp life
- Certifications: CE, RoHS, TUV, SAA, ETL, DLC - IP40
- 3 year system warranty

CONNECT DRY LPH SERIES

Linear Fixtures Connect in a Series
Dimmable LED Indoor Luminaire

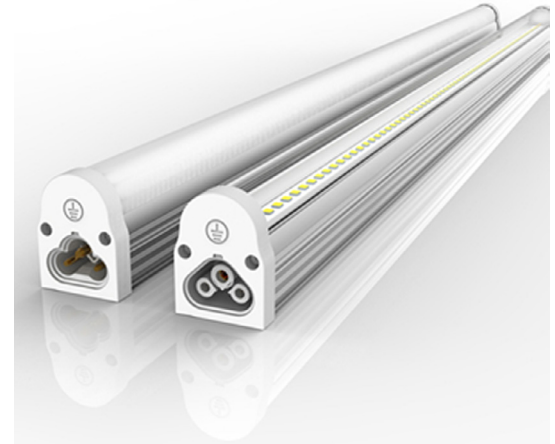

Quick and Easy Installation

Two mounting clips with screws included with each unit

Power cord and linkable cord included with each unit



Models:

- VWD8DL0600: 2' - 9W - 945 Lm - 22.4"(L) x 1.6"(W) x 1.7"(H)**
- VWD8DL0900: 3' - 13W - 1365 Lm - 34.5"(L) x 1.6"(W) x 1.7"(H)**
- VWD8DL1200: 4' - 18W - 1890 Lm - 46.5"(L) x 1.6"(W) x 1.7"(H)**
- VWD8DL1500: 5' - 25W - 2625 Lm - 58.3"(L) x 1.6"(W) x 1.7"(H)
- VWD8DL1800: 6' - 30W - 3150 Lm - 68.7"(L) x 1.6"(W) x 1.7"(H)
- VWD8DL2400: 8' - 44W - 4620 Lm - 92.8"(L) x 1.6"(W) x 1.7"(H)

| Ordering Information: | | | Part Number: | | | |
|-----------------------|------------|-------------------------|-----------------------------------|---------------|---|--------------------------------|
| *Adder Applies | | | **Available in select models only | | Ordering Example: VWD8DL0600-30-CL-DM-10-10 | |
| Family | CCT | Lens | Mounting | Connect Cord | Power Cord | Accessories* |
| VWD8DL0600 | 30 - 3000K | CL - Clear | SM - Surface Mount Clip | 10 - 10 inch | 10 - 10 inch whip | TR - TRIAC Dimming 120V Only** |
| VWD8DL0900 | 40 - 4000K | CS - Clear Striated | MC - Magnetic Clip* | 40 - 40 inch* | 40 - 40 inch whip* | OF - On/Off Switch |
| VWD8DL1200 | 50 - 5000K | FR - Frosted (Diffused) | SK1 - 40" Maximum Drop | 80 - 80 Inch* | 80 - 80 inch whip* | |
| VWD8DL1500 | 60 - 6000K | | Adjustable Suspension Kit* | | 40P - 40 inch with plug* | |
| VWD8DL1800 | | | SK2 - 80" Maximum Drop | | | |
| VWD8DL2400 | | | Adjustable Suspension Kit* | | | |



Vivid Leds, Inc.
PO BOX 9
Sellersburg, IN 47172
800-974-3570
www.vividleds.us

Dimensions, specifications, and product pictures are subject to change without notice.

F7