

## Product Description


The Aurora series delivers quality and performance at an affordable price. Utilizing the latest CREE XPE LEDs, the luminaires offer an exceptional efficacy with accurate color projection. Whether you need to replace your existing architectural lighting or install for new construction, Vivid Leds can help you deliver a perfect solution. There are many accessories available to complete the job from start to finish.

> Standard Ship - 30 Day Lead Time

|              |  |       |  |
|--------------|--|-------|--|
| Project:     |  | Type: |  |
| Location:    |  |       |  |
| Prepared By: |  | Date: |  |
| Comments:    |  |       |  |

## Performance Summary

- CREE XPE LEDS with RGB efficacy >35 Lm/W and white >80 Lm/W\*\*
- Incredible light throw with 5 degree optic lens up to 325 feet
- Provides rich atmosphere with excellent color rendering
- Solid state with high shock and vibration resistance
- Dimming capability by any DMX controller
- Precise optics with photometric lens built over each LED
- Secure installation with 6 wall mount points and easy aiming with screw adjustment
- Includes housing shell to hide inner luminaires
- Open air top and bottom for heat dissipation and self cleaning
- Rear housing cut out for easy wiring over a recessed electrical box
- Vandal proof with no option to alter DMX functions
- DMX coding required by Kontrol Master Pro 3 Series
- Kontrol Master Pro 3 sold seperately, only one needed per job
- Static color or white option dimming and on/off control requires DMX
- Extruded 6063 aluminum alloy wall mount housing with powdercoat finishes
- Durable 4mm tempered glass cover on each inner luminaire with water resistant protection
- Pure aluminum inner luminaire with 1.6" depth heatsinks improve thermal property
- Corrosion resistant, durable, with high efficiency
- 5' power cord whip & 1.5' in and out IP68 DMX cables included on each inner luminaire
- Operating temperature: -20 to 40 degrees celsius
- IP65 rated for outdoor applications
- Universal voltage: 100-240 VAC
- 100,000 hour LED life
- Certifications: CE, RoHS, ETL
- 1 year system warranty

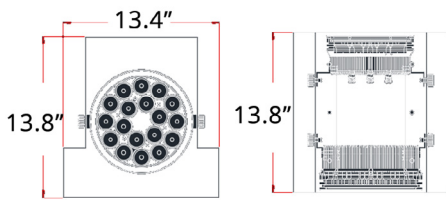

## AURORA HOTELIER SERIES

Static Color, Static White, RGB Color Changing  
LED Surface Mount Up/Down Luminaire



## Models:

- VDSPD9U: 9 LEDS - 20W Uplight Only - 13.4 Lbs
- VDSPD9D: 9 LEDS - 20W Downlight Only - 13.4 Lbs
- VDSPD9UD: 18 LEDS - 20W Uplight / 20W Downlight - 20.2 Lbs
- VDSPD18U: 18 LEDS - 40W Uplight Only - 16.5 Lbs
- VDSPD18D: 18 LEDS - 40W Downlight Only - 16.5 Lbs
- VDSPD18UD: 36 LEDS - 40W Uplight / 40W Downlight - 26.4 Lbs
- VDSPD918UD: 27 LEDS - 20W Uplight / 40W Downlight - 20.3 Lbs
- VDSPD189UD: 27 LEDS - 40W Uplight / 20W Downlight - 20.3 Lbs

## Ordering Information:

| *Adder Applies  |  |  |                | Part Number:   | Ordering Example: VDSPD9U-W-24-UNV-SG-WM |   |  |
|---|--|--|----------------|--|--|---|--|
| Family  | CCT  | Optic  | Voltage        | Finish   | Mounting                                 | Accessories*  |  |
| VDSPD9U<br>VDSPD9D<br>VDSPD9UD<br>VDSPD18U<br>VDSPD18D<br>VDSPD18UD<br>VDSPD918UD<br>VDSPD189UD | RGB - RGB Color Changing<br>W - Static White - 3000K<br>N - Static White - 4300K<br>C - Static White - 6000K<br>R - Static Red - 625nm<br>G - Static Green - 525nm<br>B - Static Blue - 460nm<br>Y - Static Yellow/Amber - 590nm | 5 - 5 Degree<br>10 - 10 Degree<br>20 - 20 Degree<br>40 - 40 Degree | UNV - 100-240V | SG - Silver Gray<br>BK - Black<br>WH - White<br>BZ - Bronze*<br>CS - Custom* | WM - Wall Mount                          | DMX Cables<br>DMX Controllers<br>RGB to DMX IP Coders<br>Wireless DMX<br>Signal Amplifiers<br>Power Cables<br>Waterproof Connectors<br>Transformers |  |



Vivid Leds, Inc.  
PO BOX 9  
Sellersburg, IN 47172  
800-974-3570  
www.vividleds.us

Dimensions, specifications, and product pictures are subject to change without notice.

\*\*80 Lm/W is based on 6000K white CCT. Static color or RGB LEDS > 35 Lm/W.

K8