



stunning
office space

2X2
1X4
2X4

3000K
3500K
4000K
5000K



Scan to download
product information

luminous ceiling led panel

- In stock, ready to ship
- Mimics the look of a skylight
- Luminous soft glow with edge-lit LEDs
- Comparable output to fluorescent troffers
- Dimmable - TRIAC, DALI, PWM, or 0-10V
- Very slim - only 0.35" inch thick
- Sturdy aluminum, oxidized frame
- Excellent 82+ CRI for color enhancement
- Lightweight, easy installation
- Multiple mounting options
- 5 year system warranty

Call 800-974-3570
Email sales@vividleds.us
www.vividleds.us



VividLeds
ILLUMINATING YOUR GREEN FUTURE

Performance Series




The Performance Series luminous ceiling panel provides magnificent, long-lasting, light output compared to fluorescent troffers, with at least 50% energy savings. Designed to Energy Star and DLC standards, along with a 100,000 hour LED lamp life and durable quality, you can be assured this luminaire will last for years to come.

Loaded with great features:

- Epistar 4014 SMD LEDs with high efficacy >95 Lm/W
- Very slim - only 0.35" inch thick
- Multiple dimming options for enhanced control
- Solid state LED light source, instant start, long life
- National listing lab tested with Type V distribution
- AL6063 aluminum frame, oxidized for enhanced beauty
- Edge-lit frame allows even light distribution
- Opalescent lens provides a soft, glare-free luminous glow
- Mimics the look of a skylight above the work surface
- Well distributed light using a patented reflecting system
- Effectively illuminates ambient light, superior foot candles
- High quality Polystyrene cover with strong capacity
- Stable performance with isolated external driver
- Driver can be remote mounted to fit your application
- Excellent CRI RA>82 for color enhancement
- Delicate shape, lightweight, simple and easy installation
- No UV or RF interference and Mercury free
- Anti-collision, impact and vibration resistant
- Quick drop-in, surface mount or suspension kit options
- Earthquake clips included for enhanced drop-in protection
- Erosion protection against hydrochloric acid
- Silent operation, no noise, no flickering
- LiFud class 2 driver with power factor: >0.95, THD<15%
- Operating temperature: -20 to 45 degrees celsius
- 100,000 hour LED lamp life
- Certifications: CE, RoHS, UL, cUL, DLC - IP44
- 10 year limited warranty

Several model choices:

- VVDES2240: 2X2 - 40W - 4950 Lm
- VVDES1440: 1X4 - 40W - 4950 Lm
- VVDES2450: 2X4 - 50W - 5085 Lm
- VVDES2460: 2X4 - 60W - 5700 Lm
- VVDES2461: 2X4 - 60W - 7330 Lm

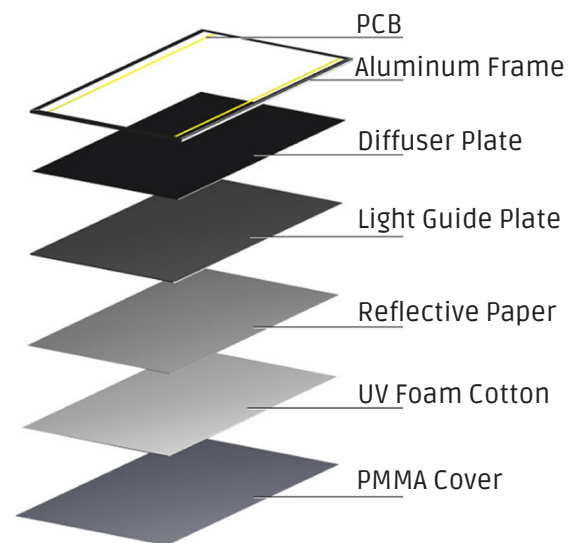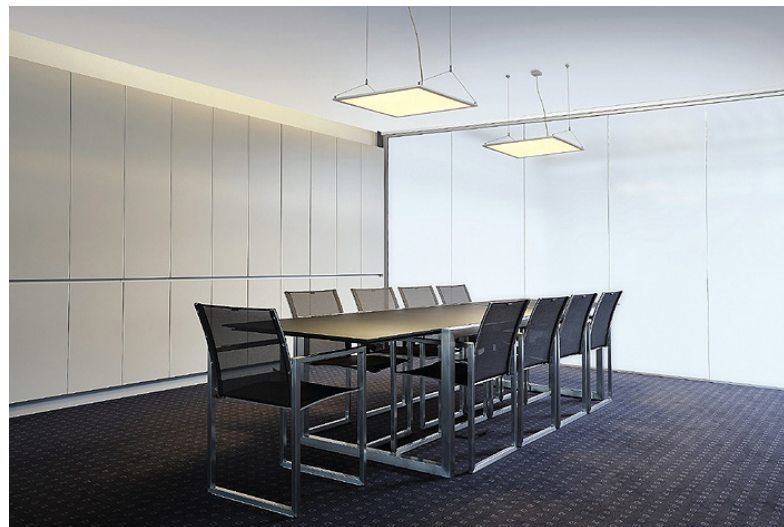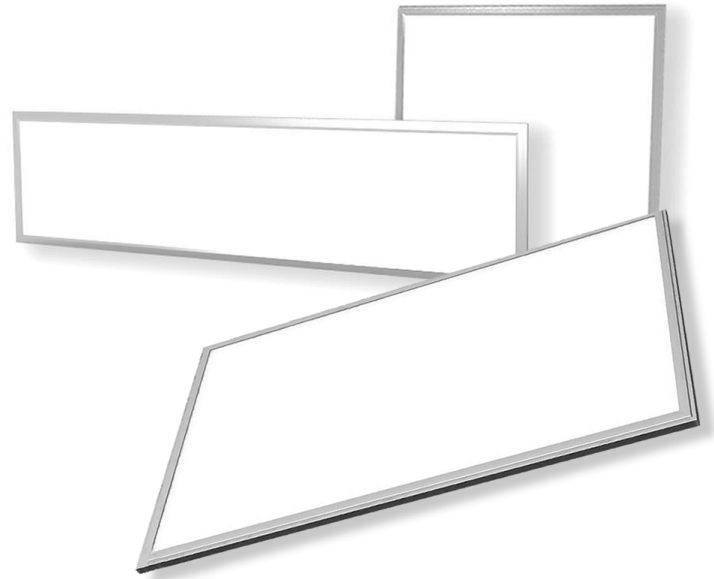

LED POWERED BY:
EPISTAR



lighting facts
LED Product Partner