

## Product Description

The Axis Path Series provides full cutoff lighting for outdoor path, walkways and landscape areas using wide spread optics designed to replace outdated Halogen and Compact Fluorescent lighting systems. When mounted on walls between 8 to 20 feet, the fixture provides accent wall wash pattern illumination. A stake mount version is also available for line or low voltage landscape accent lighting.

> Quick Ship - In Stock, Ready to Ship

Project:		Type:
Location:		
Prepared By:		Date:
Comments:		

## Performance Summary


- Samsung LH351Z LEDs with high efficacy >30 Lm/W
- Meets ARRA requirements for U.S. made fixtures
- In stock and ships from five U.S. locations for quick delivery
- USA assembled product with quick warranty support
- Patented heat dissipation design for optimum efficiency
- National listing lab tested to IES standards
- High lumen maintenance exceeds DOE requirements
- Photometric optic built over each LED for enhanced light distribution
- Solid State with high-shock and vibration resistance
- LED array manufactured using a state-of-the-art SMT machine
- Clear polycarbonate vandal-resistant array lens for reduced hot spots
- Robotically applied gaskets for consistent sealing
- Aluminum LED boards with copper tracings for best thermal management
- Individual optics robotically applied and sonically welded for precise light control
- A360 extruded ingot die-cast housing with heat sinking creates a sealed environment
- DuPont textured architectural powdercoat finish
- Chromate conversion coating for long lasting appearance
- Custom housing colors available upon request
- Mounts over a 4" recessed electrical box for wall mount applications
- Optional stake mount to 1/2" NPS coin plugs on the bottom for lawn applications
- Ground stakes for both line voltage and low voltage applications
- Options for 120 or 180 degree shield, or 360 degree coverage
- Rust resistant stainless steel hardware with durable nickel-plating
- High CRI - RA>80 enhances original colors
- 1/9th LED micro color binning enables tight color control
- Hot color targeting ensures color is within ANSI bin compliance
- 1-10V dimmable driver with surge protection option
- Fast turn on with no warm up or cold start issues
- Contains no mercury, lead, infrared or UV radiation and cool to the touch
- Operating temperature: -40 to 50 degrees celsius
- Samsung TZ chip platform with completed 6,000 hour LM-80 test
- 147,000 hour LED life @ L70 tested at 25 degrees celsius
- Certifications: CE, RoHS, CSA - IP66 outdoor rated
- 5 year system warranty

## AXIS PATH SERIES

Vandal-Resistant Deck, Wall Mount, or Path Light  
LED Dimmable Luminaire



Shown with 180 Degree Shield

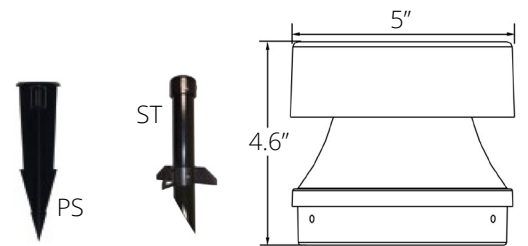

## Models:

- WDDW50: 17W - 702 Lm - 525 mA
- WDDW5T: 16W - 508 Lm - 525 mA
- WDDW5H: 16W - 508 Lm - 525 mA
- WDNP50: 17W - 702 Lm - 525 mA
- WDNP5T: 16W - 508 Lm - 525 mA
- WDNP5H: 16W - 508 Lm - 525 mA

## Ordering Information:

Part Number:

\*Adder Applies

\*\*Adder Applies. Extended Lead Time May Apply.

Ordering Example: WDAFR3037-50-T2-V27-BK-ND

Family	Optic	Voltage	Finish	Dimming	Accessories*
WDDW50 - Deck / Wall Mount 360 Degrees WDDW5T - Deck / Wall Mount 120 Degrees WDDW5H - Deck / Wall Mount 180 Degrees WDNP50 - Path Light 360 Degrees WDNP5T - Path Light 120 Degrees WDNP5H - Path Light 180 Degrees	40 - 4000K** 50 - 5000K	V27 - 120-277V 12 - 12VDC	BK - Black BZ - Bronze CS - Custom*	ND - Non Dim DM - 1-10V Dim	ST - Heavy-Duty Ground Stake with 1/2" NPS Threaded Hub. Built-In Wiring Compartment with 1/2" Coin Plugs. Black Molded Plastic. Use for Line Voltage Applications. 19" Tall with 9" Wide Stabilizer.  PS - Black Plastic Ground Stake with 1/2" NPT Threads. Use for 12V Applications. 11" H x 3" Diameter



Vivid Leds, Inc.  
PO BOX 9  
Sellersburg, IN 47172  
800-974-3570  
www.vividleds.us

Dimensions, specifications, and product pictures are subject to change without notice.

