

Product Description

The Focus series is a cut-off architectural wall luminaire is available with IES IES Type III distribution designed to replace HID lighting systems from 150w to 250 MH. Typical wall mounted lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting heights of 12 to 20 feet can be achieved.

> Quick Ship - In Stock, Ready to Ship



Project:		Type:
Location:		
Prepared By:		Date:
Comments:		

Performance Summary

- Samsung LEDs with high efficacy >115 Lm/W
- USA assembled product with quick warranty support
- Meets dark sky requirements
- Standard design with modern components, excellent choice for retrofitting
- Patented heat dissipation design for optimum efficiency
- National listing lab tested to IES standards with Type III optic
- High lumen maintenance exceeds DOE requirements
- Photometric optic built over each LED for enhanced light distribution
- Solid State with high-shock and vibration resistance
- Aluminum LED boards with copper tracings for best thermal management
- LED array manufactured using a state-of-the-art SMT machine
- Tempered clear flat glass lens
- A360 extruded ingot die-cast housing with hinged full cutoff front frame
- DuPont textured architectural powdercoat finish in bronze, white, or black
- Chromate conversion coating for long lasting appearance
- Custom housing colors available upon request
- Mounts directly over a 4" recessed outlet box with easy hang wall bracket
- Rust resistant stainless steel hardware with durable nickel-plating
- Fin heatsinks for best heat dissipation and long life
- High CRI - RA>80 enhances original colors
- 1-10V dimmable driver with surge protection
- Fast turn on with no warm up or cold start issues
- Contains no mercury, lead, infrared or UV radiation and cool to the touch
- Operating temperature: -40 to 50 degrees celsius
- Samsung chip platform with completed 6,000 hour LM-80 test
- 393,000 hour LED life @ L70 tested at 25 degrees celsius
- Certifications: CE, RoHS, CSA - IP65 outdoor rated
- 5 year system warranty

FOCUS CW SERIES

Full Cutoff Glass Lens Crescent Down Light Wall Sconce
LED Dimmable Luminaire

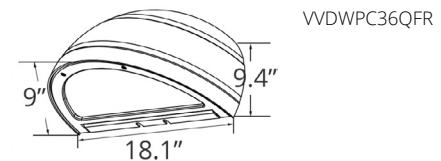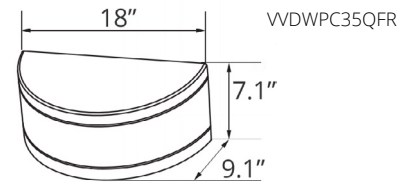

Models:

- VDWPC35Q: 47W - 5445 Lm (Flat Top) - 525mA - B:1, U:1, G:1
- VDWPC36Q: 47W - 5445 Lm (Rounded Top) - 525mA - B:1, U:1, G:1

Ordering Information:				Part Number:		Ordering Example: VDWPC35Q-50-S3S-V27-BZ-ND	
Family	CCT	Optic	Voltage	Finish	Dimming	Accessories*	
VDWPC35Q VDWPC36Q	30 - 3000K** 40 - 4000K** 50 - 5000K	S3S - Type III Short Clear Flat Glass Lens	V27 - 120-277V V28 - 347/480V*	BZ - Bronze CS - Custom*	ND - Non Dim DM - 1-10V Dim	SF - Single Fuse DF - Double Fuse SP - 20kA Surge Protection 120-277VAC EM - Emergency Driver Provides 90 Minutes of Backup Power PC1 - Button Photocell 120V*** PC2 - Button Photocell 250-305V*** ***VDWPC35Q Only.	



Vivid Leds, Inc.
PO BOX 9
Sellersburg, IN 47172
800-974-3570
www.vividleds.us

Dimensions, specifications, and product pictures are subject to change without notice.

The product on this page is a manufactured to order, non-stocking item. This product cannot be returned for refund or credit.

D16

Revised 3.24.18