

## Product Description

The Array XS series wall pack luminaire is the perfect choice for security, entryways, stairways, storage and perimeter areas, as well as residential exteriors. Realize all of the features of a high quality unit with Philips LEDs, a die cast housing, powdercoat, and UV lens, while maintaining a budget price. Look no further than the Array series to deliver outstanding performance for years to come.

> Quick Ship - In Stock, Ready to Ship


Project:		Type:
Location:		
Prepared By:		Date:
Comments:		

## Performance Summary

- Philips Lumileds 3030 LEDs with high efficacy >100 Lm/W
- Modern design with modern components, excellent choice for retrofitting
- Low profile, 3G vibration rated compact design prescribed by ANSI C136.31
- Patented heat dissipation design for optimum efficiency
- National listing lab tested to IES standards
- High lumen maintenance exceeds DOE requirements
- Photometric optic built over each LED for enhanced light distribution
- Solid State with high-shock and vibration resistance
- Rugged one-piece A360 die-cast housing with integral heat sink
- Housing is completely sealed against moisture and environmental contaminants
- Aluminum LED boards with copper tracings for best thermal management
- LED array manufactured using a state-of-the-art SMT machine
- Light engine is available in a 5000K (70 CRI) configuration
- Optics are precisely designed to shape the distribution, maximizing efficiency
- Polycarbonate optical lens with UV stabilizers provide outstanding performance
- Architectural bronze powdercoat finish
- Chromate conversion coating for long lasting appearance
- Rust resistant stainless steel hardware with durable nickel-plating
- Cast-in template for mounting directly over a 4" recessed outlet box
- Can also be direct wall mounted with 1/2" entry at the bottom for conduit
- Integrated dusk to dawn photocell installed
- Fast turn on with no warm up or cold start issues
- 1/9th micro color binning enables tight color control
- Hot color targeting ensures color is within ANSI bin compliance
- Contains no mercury, lead, infrared or UV radiation and cool to the touch
- Operating temperature: -40 to 104 degrees F (-40 to 40 degrees C)
- 100,000 hour LED life based on LM-80 results and TM-21 calculation
- Certifications: CE, RoHS, UL, cUL, DLC - IP65 outdoor rated
- 5 year system warranty

## ARRAY XS SERIES

Wall Pack  
LED Luminaire

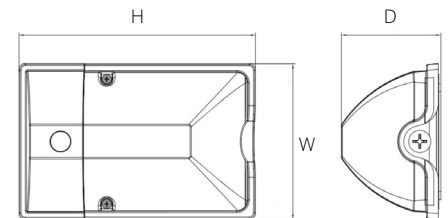

## Models:

- WDMWM017: 17W - 1700 Lm - 5.5" (W) x 3.5 (D) x 8.4" (H) - 2.1 Lbs
- WDMWM025: 25W - 2600 Lm - 5.5" (W) x 3.5 (D) x 8.4" (H) - 2.1 Lbs

<b>Ordering Information:</b>				Part Number:		
Ordering Example: WDMWM0117-50-T5-V27-BZ-ND						
Family	CCT	Optic	Voltage	Finish	Dimming	Accessories
WDMWM0117 WDMWM0125	50 - 5000K	T5 - Type IV Clear Lens	V27 - 120-277V	BZ - Bronze	ND - Non Dim	



Vivid Leds, Inc.  
PO BOX 9  
Sellersburg, IN 47172  
800-974-3570  
www.vividleds.us

Dimensions, specifications, and product pictures are subject to change without notice.