

VividLeds

ILLUMINATING YOUR GREEN FUTURE

Exite Series

Multi-Application Luminaires
with Multiple Optics and Mounting Options



Vivid Leds, Inc. PO BOX 9, Sellersburg, IN 47172

Phone/Fax: 800-974-3570

Email: sales@vividleds.us

www.vividleds.us

EXTREME FLOOD & SPOT LIGHTING



Exite FL

- 4 Mounting Options
- 4 IES Distributions
- 5 Kelvin Choices

Models:

- WDFLE250 - 1 Module - 250W - 36614 Lm
- WDFLE300 - 2 Modules - 300W - 45965 Lm
- WDFLE400 - 2 Modules - 400W - 58147 Lm
- WDFLE500 - 2 Modules - 500W - 69256 Lm
- WDFLE600 - 3 Modules - 600W - 83112 Lm
- WDFLE750 - 3 Modules - 750W - 103074 Lm
- WDFLE100 - 4 Modules - 1000W - 139692 Lm
- WDFLE125 - 5 Modules - 1250W - 172257 Lm



Dark Sky
Compliant Visor

Trunion
270 Degree Rotation

Straight Arm Bracket or
Angle Adjustable Slipfitter

Quad Tenon
for WDFLE250



INTENSE LIGHT OUTPUT




STADIUMS IN A NEW LIGHT

Exite Max

3 IES Distributions / 5 Kelvin Choices

Models:

- WDSP300W - 300W - 41130 Lm
- WDSP400W - 400W - 54150 Lm
- WDSP500W - 500W - 65830 Lm

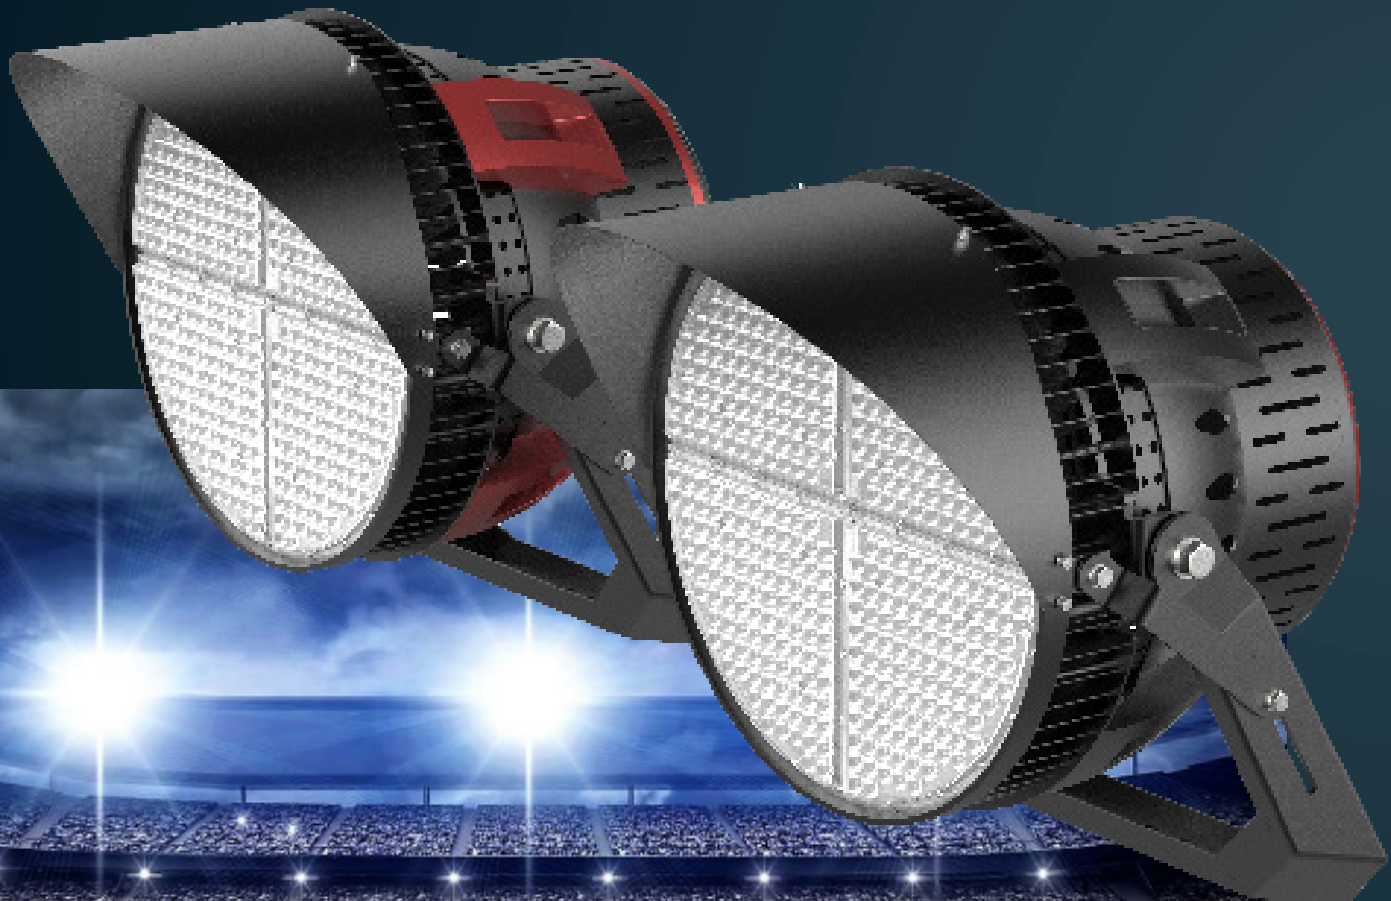



AREA/SITE/PARKING LOT/FLOOD



Models:

- VVDAF080 - 80W - 11393 Lm
- VVDAF100 - 100W - 13678 Lm
- VVDAF150 - 150W - 21828 Lm
- VVDAF185 - 185W - 25561 Lm
- VVDAF240 - 240W - 33771 Lm
- VVDAF300 - 300W - 42549 Lm
- VVDAF400 - 400W - 56932 Lm
- VVDAF500 - 500W - 69616 Lm

Exite PL

- 4 Mounting Options
- 7 IES Distributions
- 5 Kelvin Choices



TR - 180 Degree Adjustable Trunnion



SF - 180 Degree Adjustable Slipfitter




U - Large Adjustable Yoke Bracket



EA - Arm Mount for Wall or Pole

HIGH BAY/LOW BAY

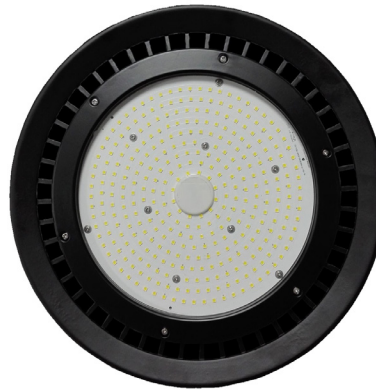

Exite Pro

4 Mounting Options

11 IES Distributions

8 Kelvin Choices



Models:

- VVDS10W - 184 LEDs - 100W - 13803 Lm
- VVDS15W - 224 LEDs - 150W - 20031 Lm
- VVDS20W - 288 LEDs - 200W - 26011 Lm
- VVDS24W - 336 LEDs - 240W - 31115 Lm
- VVDS30W - 455 LEDs - 300W - 42180 Lm
- VVDS40W - 534 LEDs - 400W - 48977 Lm
- VVDS50W - 712 LEDs - 500W - 65921 Lm

WHY GET EXCITED:

- 1** HIGH EFFICACY PHILIPS LUMILEDS LUXEON 3030 2D LEDS UP TO 145 LM/W
- 2** DIMMABLE BY 1-10V, PWM, RESISTANCE, OR DALI
- 3** PMMA SHATTERPROOF CLEAR LENS FOR DURABILITY AND CLARITY
- 4** DESIGNED FOR HARSH TEMPERATURE AND HIGH HUMIDITY
- 5** INDUSTRIAL COLD FORGED DIE CAST FIXTURE HOUSING
- 6** EXCELLENT RESISTANCE TO CORROSION, UV DEGRADATION AND ABRASION
- 7** ELECTROPHORESIS SURFACE TREATMENT FINISH WITH STAINLESS HARDWARE
- 8** MEANWELL DRIVER - SHORT CIRCUIT, CURRENT, VOLTAGE & TEMP PROTECTION
- 9** IP66 WASHDOWN RATED FOR INDOOR OR OUTDOOR APPLICATIONS
- 10** CERTIFICATIONS: CE, ROHS, FCC, TUV, IK10, CUL, UL, DLC PREMIUM