

Product Description

The Kontrol Signal DMX Series is a signal amplifier that can withstand the elements. With a IP65 rating, it can be outdoors within your application for long DMX runs over 300'. With matching waterproof connectors to our Twilight fixtures, this amplifier can simply connect in line with other fixtures.

> Standard Ship - 30 Day Lead Time

Project:		Type:
Location:		
Prepared By:		Date:
Comments:		

Performance Summary

- Strong adaptability, high reliability and small size
- Opto-coupler isolation between I/O signal
- Synchronizes multiple RGB LED lighting fixtures
- Quick installation with wall or ground mounting
- Install an amplifier every 300' for best signal operation
- Install an amplifier every 60 fixtures
- IP68 male and female I/O signal cables
- Plug-n-play system
- Microcomputer control technology
- Meets DMX 512 protocols
- Repeats signal to control for an unlimited amount of
- Real-time color and effect changes
- Settings take effect immediately without re-power
- Power consumption: 2W
- Dimensions: 7.9"(L) x 3.7"(W) x 2.4"(H)
- Weight: 3.3 Lbs
- Operating temperature: -20 to +40C
- IP65 Rated for outdoor applications
- 1 year system warranty


KONTROL SIGNAL DMX SERIES

Maintains Optimal Signal For Long DMX Runs




LED DMX Signal Amplifier



Installation:

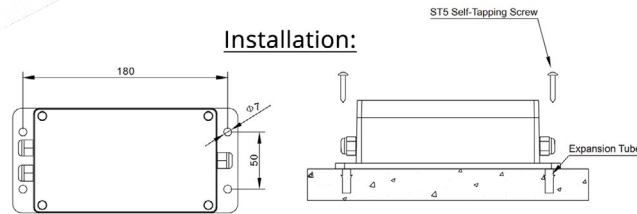

Standard DMX512 signal amplifier: one input & one output connector/XLR-3

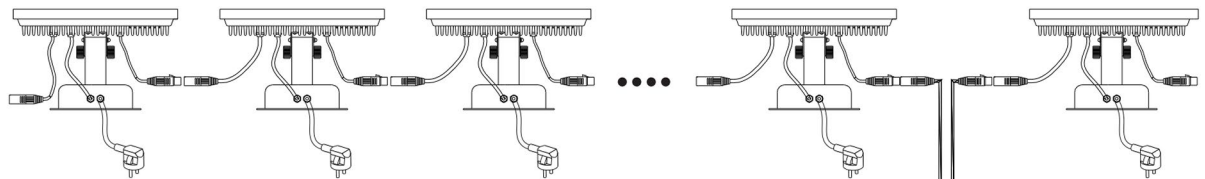

XLR-3	Signal Cable
1	Shield
2	Black-
3	Red+

VVD505

Ordering Information:

Part Number:

*Adder Applies

Ordering Example: VVD505-120-WT-WM

Family	Voltage	Finish	Mounting	Accessories*
VVD505	120 - 120 VAC 240 - 240 VAC	WT - White	WM - Wall Mount	DMX Cables DMX Controllers Wireless DMX



Vivid Leds, Inc.
PO BOX 9
Sellersburg, IN 47172
800-974-3570
www.vividleds.us

Dimensions, specifications, and product pictures are subject to change without notice.

The product on this page is a manufactured to order, non-stocking item. This product cannot be returned for refund or credit.

L11

Revised 6.1.16