

## Product Description

Alume WPR LED wall pack is designed with rotatable light heads to adjust the the light output to the right spot. The Alume replaces traditional MH / HPS wall packs using well sealed die-cast aluminum housings and polycarbonate lenses. The Alume is easy to install and has a dimming function available. Replace your MH / HPS wall packs up to 400W with the latest technology in lighting - the Alume WPP!

> Quick Ship - In Stock, Ready to Ship

|              |  |       |
|--------------|--|-------|
| Project:     |  | Type: |
| Location:    |  |       |
| Prepared By: |  | Date: |
| Comments:    |  |       |

## Performance Summary

- Energy-efficient Philips Lumileds SMD LEDs with high efficacy >130 Lm/W
- USA assembled product with quick warranty support
- In stock and ships from several U.S. locations for quick delivery
- Better visibility than HID or fluorescent with crisp, 5000K white light
- Open frame design with Type V IES 60 degree rotatable beam angle
- Patented design with high quality components, excellent choice for retrofitting
- National listing lab tested to IES standard
- High lumen maintenance exceeds DOE requirements
- Solid State with high-shock and vibration resistance
- Aviation grade aluminum alloy die cast housing with bronze powdercoat finish
- Chromate conversion anti-corrosion coating for long lasting appearance
- Streamlined housing, no rough edges or scraping, with 304 stainless steel hardware
- Housing and driver compartment is one piece to maximize heat dissipation
- Innovative quick mount bracket for easy, contractor friendly installation
- 1/9th LED micro color binning enables tight color control
- Hot color targeting ensures color is within ANSI bin compliance
- CNC machined LED boards are flatness controlled to 0.1mm to speed up heat dissipation
- High quality and efficient thermal heatsinks for long life
- Shatterproof polycarbonate lens over the LEDs with rubber grommet
- Advanced, serviceable, constant current dimmable Sosen driver
- High power factor with IC controlled LED circuits and low THD driver
- Low junction temperature for long life and low lumen depreciation
- Instant illumination and restrike with no warm up or cold start issues
- Contains no mercury, lead, infrared or UV radiation and cool to the touch
- Commercial CRI: RA>70
- Operating temperature: -40 to 40 degrees celsius
- 100,000 hour LED life of maintenance-free, safe operation
- IP65 rated for indoor or outdoor locations
- Certifications: CE, RoHS,UL, cUL, DLC
- 10 year limited warranty


## Alume WPR

Rotatable Polycarbonate Lens Wall Pack  
LED Dimmable Luminaire



## Models:

- VDWDP40WV2: 40W - 4800 Lm - 18 Lbs
- VDWDP80WV2: 80W - 10400 Lm - 22 Lbs

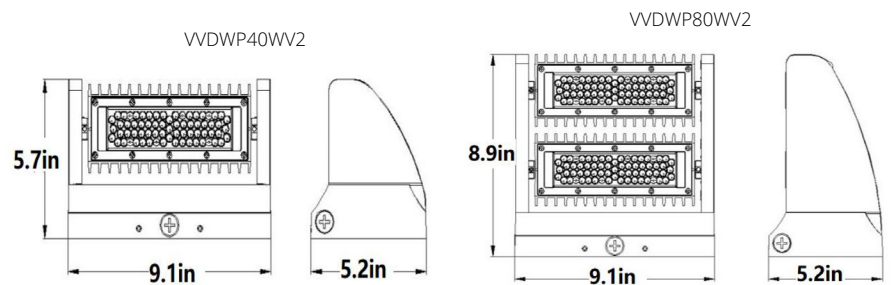

| Ordering Information:    |            |                       |                | Part Number:                                    |                |                 |  |
|--------------------------|------------|-----------------------|----------------|---|----------------|-----------------|--|
| *Adder Applies           |            |                       |                | Ordering Example: VDWDP80WV2-50-S5-UNV-BZ-DM-WM |                |                 |  |
| Family                   | CCT        | Optic                 | Voltage        | Finish  | Dimming        | Mounting        |  |
| VDWDP40WV2<br>VDWDP80WV2 | 50 - 5000K | S5 - Type V 60 Degree | UNV - 100-277V | BZ - Bronze                                     | DM - 0-10V Dim | WM - Wall Mount |  |



Vivid Leds, Inc.  
PO BOX 9  
Sellersburg, IN 47172  
sales@vividleds.us  
www.vividleds.us

Dimensions, specifications, and product pictures are subject to change without notice.

Dimensional pictures are for reference only. They do not represent the actual fixture's shop drawing or design.

D13