

Product Description

With a high performance heat sink, exceptional lumen maintenance, and a rock solid housing, the Exite Pro will last for many years to come. With lumen packages ranging in comparison from 400W to 1500W HID, a variety of color temperatures and optics, this luminaire can be used in many different applications. The Lumileds LED is 170 Lm/W at 80 CRI is an exceptional choice for all high bay applications where quality is needed.

> Special Order - Minimum 30 Day Lead Time

Project:		Type:
Location:		
Prepared By:		Date:
Comments:		

Performance Summary

- Philips Lumileds Luxeon 2835 2D LEDs with high efficacy up to 170 Lm/W
- National listing lab tested with Type V distributions
- IK08 tempered clear glass lens for durability and clarity
- Designed for harsh temperature and high humidity
- Solid state with high shock and vibration resistance
- Instant on and off without delay or re-strike
- Industrial cold forged die cast fixture housing
- Smooth electrophoresis surface treatment finish with stainless hardware
- Excellent resistance to corrosion, UV degradation and abrasion
- Integrated thread with eyelet for hook, pendant, or suspension installation
- 1 foot attached power cord whip - 18AWG*3C 300V/UL/105°
- High CRI - RA>80 enhances original colors
- 1/9th micro color binning enables tight color control
- Hot color targeting ensures color is within ANSI bin compliance
- No lead, mercury, UV or IR radiation
- Short circuit, over current, over voltage, over temp protection
- Advanced, serviceable, 0-10V dimmable constant current Sosen driver
- Driver has integrated 4kV surge protection
- Operating temperature: -30 to 45 degrees celsius
- IP65 washdown rated for indoor or outdoor applications
- Over 100,000 hour LED life
- Certifications: CE, RoHS, RCM, FCC, TUV, CB, IK08, cUL, UL, DLC
- 10 year limited warranty

EXITE PRO

Affordable Solution with Multiple Mounting Options
LED Dimmable Luminaire



Models:

- WDS10W - 100W - 16985 Lm - 12.4" (D) x 5.9" (H) - 7.5 Lbs - M10 Thread - 60, 90, 120 Degrees
- WDS15W - 150W - 25915 Lm - 12.4" (D) x 5.9" (H) - 8.4 Lbs - M10 Thread - 60, 90, 120 Degrees
- WDS20W - 200W - 32725 Lm - 12.4" (D) x 5.9" (H) - 12.2 Lbs - M12 Thread - 60, 90, 120 Degrees
- WDS24W - 240W - 39965 Lm - 12.4" (D) x 6.9" (H) - 12.2 Lbs - M12 Thread - 60, 90, 120 Degrees
- WDS30W - 300W - 50107 Lm - 15.2" (D) x 7.9" (H) - 14.9 Lbs - M10 Thread - 120 Degrees
- WDS40W - 400W - 66926 Lm - 15.2" (D) x 9.1" (H) - 19.8 Lbs - M12 Thread - 120 Degrees
- WDS50W - 500W - 81658 Lm - 16.7" (D) x 9.4" (H) - 19.8 Lbs - M12 Thread - 90, 120 Degrees
- WDS60W - 600W - 102000 Lm - 16.7" (D) x 11.0" (H) - 19.8 Lbs - M12 Thread - 90, 120 Degrees

Ordering Information:				Part Number:	Ordering Example: WVS10W-40-T52-UNV1-BK-ND-HK			
Family	CCT	Optic	Voltage	Finish	Dimming	Mounting	Accessories*	
WDS10W WDS15W WDS20W WDS24W WDS30W WDS40W WDS50W WDS60W	30 - 3000K 40 - 4000K 50 - 5000K 57 - 5700K 65 - 6500K	T51 - Type V 60 Degree T52 - Type V 90 Degree T53 - Type V 120 Degree	UNV1 -100-277V UNV2 - 200-480V*	BK - Black WT - White* CS - Custom* Note: Extended Lead Time Applies For Custom Housing Colors	ND - No Dim D1 - 0-10V Dim	HK - Integrated Eyelet PM - Conduit NPT (See thread size)	SC - 2.5' Safety Cable WG - Wire Guard DS - Daylight Sensor MS1 - IP20 Motion Sensor MS2 - IP65 Motion Sensor RB - M12 to M10 Reducer PG1 - 120V Grounded Plug PG2 - 277V NEMA Lock Plug PC6 - 6.5' Power Cord Extension with IP65 Connector (Field Installed) EM - Emergency Backup	



Vivid Leds, Inc.
PO BOX 9
Sellersburg, IN 47172
330-809-0431
www.vividleds.us



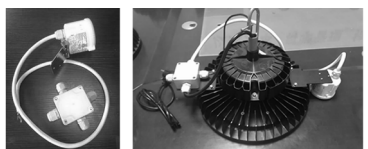
Dimensions, specifications, and product pictures are subject to change without notice.

The product on this page is a manufactured to order, non-stocking item. This product cannot be returned for refund or credit.

E1

Revised 9.17.23

Accessories:

<p>DS - Daylight Sensor</p> <ul style="list-style-type: none"> • Directly connected to 1-10V interface • Simple setup of target light by means of a potentiometer • 13' maximum mounting height 		<p>APPLICATIONS:</p> <ul style="list-style-type: none"> • High Bays / Low Bays • Canopies • Gymnasiums • Warehouses
<p>MS1 - IP20 Motion Sensor</p> <ul style="list-style-type: none"> • Automatically dims when combined with 1-10V dimming • Built-in adjustable daylight sensor • Compact size to attach to the side of the highbay • Wide detection area up to 50' in diameter 		<p>APPLICATIONS:</p> <ul style="list-style-type: none"> • High Bays / Low Bays • Canopies • Gymnasiums • Warehouses • Manufacturing
<p>MS2 - IP65 Motion Sensor</p> <ul style="list-style-type: none"> • Automatically dims when combined with 1-10V dimming • Built-in adjustable daylight sensor • Compact size to attach to the side of the highbay • Wide detection area up to 50' in diameter 		<p>APPLICATIONS:</p> <ul style="list-style-type: none"> • High Bays / Low Bays • Canopies • Gymnasiums • Warehouses • Manufacturing



Vivid Leds, Inc.
 PO BOX 9
 Sellersburg, IN 47172
 330-809-0431
 www.vividleds.us

Dimensions, specifications, and product pictures are subject to change without notice.

The product on this page is a manufactured to order, non-stocking item. This product cannot be returned for refund or credit.