

Product Description

This Raptor FC full cutoff slim wall pack is a powerful luminaire that has been designed to meet a wide variety of locations. With the various mounting options it can be used as a flood light or as an area light. With the LEDs mounted on the large heatsink, the fixture can maintain a high lumen output while keeping the LED modules at a cool temperature.

> Quick Ship - In Stock, Ready to Ship


Project:		Type:
Location:		
Prepared By:		Date:
Comments:		

Performance Summary

- Energy-efficient Philips Lumileds SMD LEDs with high efficacy >140 Lm/W
- In stock and ships from several U.S. locations for quick delivery
- Easy access to control switch for a range of CCT's from 3000K to 5000K
- Wattage selectable switch allows for a wide range of lumen outputs
- Open frame design with hinged bracket
- Patented design with high quality components, excellent choice for retrofitting
- National listing lab tested to IES standard with Type IV degree beam angle
- High lumen maintenance exceeds DOE requirements
- Solid State with high-shock and vibration resistance
- Aviation grade aluminum alloy die cast housing with bronze powdercoat finish
- Chromate conversion coating for long lasting appearance
- Streamlined housing, no rough edges or scraping, with 304 stainless steel hardware
- Housing and driver compartment is one piece to maximize heat dissipation
- Contractor friendly quick mount bracket included with bubble level
- Includes integrated photocell with on/off switch
- Optional plug in occupancy sensor and 8W EM battery backup
- 1/9th LED micro color binning enables tight color control
- Hot color targeting ensures color is within ANSI bin compliance
- CNC machined LED boards are flatness controlled to 0.1mm to speed up heat dissipation
- High quality and efficient thermal heatsinks for long life
- High impact resistant polycarbonate lens over the LEDs with rubber grommet
- Advanced, serviceable, constant current Sosen driver
- High power factor with IC controlled LED circuits and low THD driver
- Instant illumination and restrike with no warm up or cold start issues
- Contains no mercury, lead, infrared or UV radiation and cool to the touch
- Commercial CRI: RA>70
- Operating temperature: -40 to 40 degrees celsius
- 100,000 hour LED life of maintenance-free, safe operation
- IP65 rated for indoor or outdoor locations
- Certifications: CE, RoHS, FCC, UL, cUL, DLC
- 10 year limited warranty

Raptor FC

Wattage Selectable & Color Tunable Slim Wall Pack
LED Luminaire

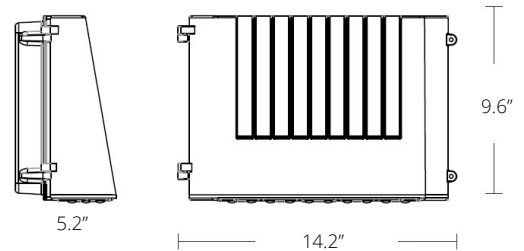

Models:

- WDSM311040: 20W/30W/40W - 5594 Lm - 3000K/4000K/5000K - 8 Lbs
- WDSM311055: 25W/45W/55W - 7237 Lm - 3000K/4000K/5000K - 8 Lbs
- WDSM312011: 60W/80W/110W - 14169 Lm - 3000K/4000K/5000K - 8 Lbs

Ordering Information:				Part Number:		
*Adder Applies				Ordering Example: WDSM311040-CT-S4-UNV-BZ-ND		
Family	CCT	Optic	Voltage	Finish	Dimming	Accessories*
WDSM311040 WDSM311055 WDSM312011	CT - Color Tunable	S4 - Type IV Forward Throw	UNV - 120-277V	BZ - Bronze CS - Custom*	ND - Non Dim	EM - 8W Battery Backup MS - Occupancy Sensor



Vivid Leds, Inc.
PO BOX 9
Sellersburg, IN 47172
sales@vividleds.us
www.vividleds.us

Dimensions, specifications, and product pictures are subject to change without notice.

Dimensional pictures are for reference only. They do not represent the actual fixture's shop drawing or design.

D19