

Product Description

The Axis Pillar Top luminaires with UV-stabilized polycarbonate lenses and sealed optical compartments are designed to replace HID lighting systems up to 70w MH or HPS. These fixtures are designed for use on pillars, columns, fences, railings and other outdoor structures. Ideal for use in retail centers, schools and universities, office buildings, apartments and condominium complexes, and residential areas.

> Quick Ship - In Stock, Ready to Ship




Project:		Type:
Location:		
Prepared By:		Date:
Comments:		

Performance Summary

- Samsung LH351Z LEDs with high efficacy >90 Lm/W
- Buy American Act and ARRA compliant
- Quick Ship - In stock and ships from six locations for quick delivery
- USA assembled product with quick warranty support
- Solid State with high-shock and vibration resistance
- LED array manufactured using a state-of-the-art SMT machine
- Polycarbonate vandal-resistant array lens for reduced hot spots
- Robotically applied gaskets for consistent sealing
- Aluminum LED boards with copper tracings for best thermal management
- Individual optics robotically applied and sonically welded for precise light control
- A360 extruded ingot die-cast housing with heat sinking creates a sealed environment
- Integrated die-cast flush mounting base with 1/2" coin plug on bottom
- DuPont textured architectural powdercoat finish
- Chromate conversion coating for long lasting appearance
- Custom housing colors available upon request
- Rust resistant stainless steel hardware with durable nickel-plating
- High CRI - RA>80 enhances original colors
- 1/9th LED micro color binning enables tight color control
- Hot color targeting ensures color is within ANSI bin compliance
- 0-10V dimmable driver with surge protection option
- Fast turn on with no warm up or cold start issues
- Contains no mercury, lead, infrared or UV radiation and cool to the touch
- Operating temperature: -20 to 40 degrees celsius
- Samsung TZ chip platform with completed 6,000 hour LM-80 test
- 106,000 hour LED life @ L70 tested at 25 degrees celsius
- Certifications: CE, RoHS, CSA - IP66 outdoor rated
- 10 year limited warranty

AXIS PILLAR TOP

Round or Square, Pyramid, Flat, or Dome Top
LED Luminaire

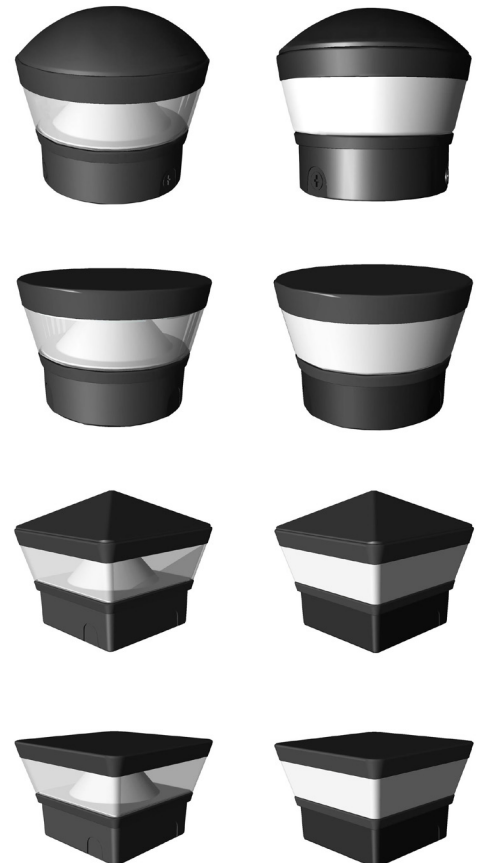

Models:

- WDB11X16 - 16W - 1554 Lm - B:1, U:3, G:1
- WDB11X23 - 23W - 2175 Lm - B:1, U:3, G:1
- WDB11X34 - 34W - 3263 Lm - B:1, U:4, G:2

Ordering Information:

Part Number:

*Adder Applies

Ordering Example: WDB1PTQ-40-S51-V27-BZ-ND

Family	CCT	Optic	Voltage	Finish	Housing Type	Accessories*
WDB11X16 WDB11X23 WDB11X34	30 - 3000K 40 - 4000K	S51 - Type V Clear Lens S52 - Type V Diffused Lens	V27 - 120-277V	BZ - Bronze BK - Black CS - Custom*	RF - Round Flat Top RD - Round Dome Top SF - Square Flat Top SP - Square Pyramid Top	SP - 20kA Surge Protection 120-277VAC PC - Button Photocell 120-277V



Vivid Leds, Inc.
PO BOX 9
Sellersburg, IN 47172
800-974-3570
www.vividleds.us

Dimensions, specifications, and product pictures are subject to change without notice.

Z60