

Product Description

The Focus FC up and down architectural wall luminaire is available with an IES Type V distribution designed to replace HID lighting systems from 150w to 250w MH or HPS. Typical wall mounted lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting heights of 12 to 20 feet can be used.

> Quick Ship - In Stock, Ready to Ship


Project:		Type:
Location:		
Prepared By:		Date:
Comments:		

Performance Summary

- Samsung LEDs with high efficacy >125 Lm/W
- Buy American Act and ARRA compliant
- Quick Ship - In stock and ships from six locations for quick delivery
- USA assembled product with quick warranty support
- Standard design with modern components, excellent choice for retrofitting
- Patented heat dissipation design for optimum efficiency
- National listing lab tested to IES standards with Type III optic
- High lumen maintenance exceeds DOE requirements
- Photometric optic built over each LED for enhanced light distribution
- Solid State with high-shock and vibration resistance
- Aluminum LED boards with copper tracings for best thermal management
- LED array manufactured using a state-of-the-art SMT machine
- Tempered clear flat glass lens on bottom
- Oval molded tempered clear flat glass lens on top
- A360 extruded ingot die-cast housing with hinged full cutoff front frame
- DuPont textured architectural bronze powdercoat finish
- Chromate conversion coating for long lasting appearance
- Custom housing colors available upon request
- Mounts directly over a 4" recessed outlet box with easy hang wall bracket
- Rust resistant stainless steel hardware with durable nickel-plating
- Fin heatsinks for best heat dissipation and long life
- High CRI - RA>80 enhances original colors
- 1-10V dimmable driver with surge protection
- Fast turn on with no warm up or cold start issues
- Contains no mercury, lead, infrared or UV radiation and cool to the touch
- Operating temperature: -40 to 50 degrees celsius
- Samsung chip platform with completed 6,000 hour LM-80 test
- 410,000 hour LED life @ L70 tested at 25 degrees celsius
- Certifications: CE, RoHS, CSA - IP55 outdoor rated
- 10 year limited warranty

FOCUS FC


Glass Lens Up / Down Crescent Wall Sconce
LED Dimmable Luminaire

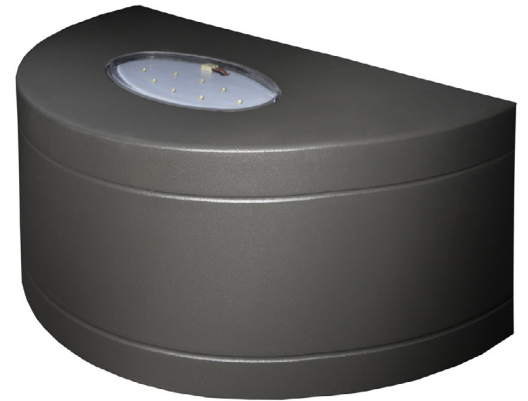

Top View



Bottom View

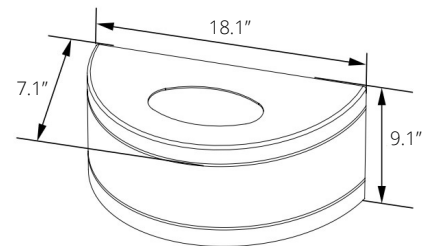

Models:

- VDWDP36Q: 46W - 5922 Lm - 12W Up and 34W Down - 525mA - B:2, U:5, G:0

Ordering Information:				Part Number:		
*Adder Applies **Adder Applies. Extended Lead Time.				Ordering Example: VDWDP36Q-50-T5-V27-BZ-ND		
Family	CCT	Optic	Voltage	Finish	Dimming	Accessories*
VDWDP36Q	40 - 4000K 50 - 5000K	T5 -Type V Clear Flat Glass	V27 - 120-277V	BZ - Bronze CS - Custom**	ND - Non Dim DM - 1-10V Dim	SP - 20kA Surge Protection 120-277VAC EM - Emergency Driver Provides 90 Minutes of Backup Power



Vivid Leds, Inc.
PO BOX 9
Sellersburg, IN 47172
800-974-3570
www.vividleds.us

Dimensions, specifications, and product pictures are subject to change without notice.

Z70