

Product Description

The Xsite series is a ARRA and BAA compliant wall sconce using the latest Samsung LEDs. From benchmarking a minimum 104 degree F ambient during thermal testing, to custom designed LED arrays for each luminaire individually, to using the best housing materials and coatings, each aspect has been taken into careful consideration to ensure many years of trouble-free service.

> Quick Ship - In Stock, Ready to Ship


Project:		Type:
Location:		
Prepared By:		Date:
Comments:		

Performance Summary

- Samsung COB LEDs with high efficacy >125 Lm/W
- Buy American Act and ARRA compliant
- Quick Ship - In stock and ships from six locations for quick delivery
- USA assembled product with quick warranty support
- Patented heat dissipation design for optimum efficiency
- National listing lab tested to IES standards
- High lumen maintenance exceeds DOE requirements
- Solid State with high-shock and vibration resistance
- Aluminum LED boards with copper tracings for best thermal management
- LED array manufactured using a state-of-the-art SMT machine
- A360 extruded aluminum ingot housing
- Flush mount easy hang wall bracket with built-in level
- Rust free, vandal-resistant, stainless nickle-plated screws
- Dupont powdercoat finish over a chromate conversion coating
- Internal ballast tray in sealed compartment
- Clear Lexan polycarbonate inner lens for clarity and to seal LED array
- Mounts over a 4" recessed outlet box
- Photocell adaptable
- Custom housing colors available upon request
- Fin heatsinks for best heat dissipation and long life
- High CRI - RA>80 enhances original colors
- 0-10V dimmable driver with surge protection and battery backup option
- Fast turn on with no warm up or cold start issues
- Contains no mercury, lead, infrared or UV radiation and cool to the touch
- Operating temperature: -20 to 40 degrees celsius
- Samsung chip platform with completed 6,000 hour LM-80 test
- 187,000 hour LED life @ L70 tested at 105 degrees celsius
- Certifications: CE, RoHS, CSA - IP67 outdoor rated
- 10 year limited warranty

XSITE SCONCE

Easy Hang Wall Bracket with Built-in Level
LED Dimmable COB Luminaire

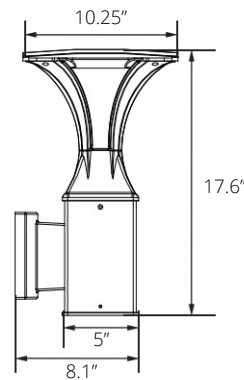

Models:

- WDBB3FR - 16W - 1731 Lm - Round - B:1, U:3, G:1
- WDBB4FR - 16W - 1813 Lm - Square - B:1, U:2, G:1
- WDBB5FR - 25W - 2597 Lm - Round - B:1, U:3, G:1
- WDBB6FR - 25W - 2719 Lm - Square - B:1, U:3, G:1

Ordering Information:

Part Number:

*Adder Applies **Adder Applies. Extended Lead Time.

Ordering Example: WDBB3FR-40-T5-UNV-BZ-ND

Family	CCT	Optic	Voltage	Finish	Dimming	Accessories*
WDBB3FR WDBB4FR WDBB5FR WDBB6FR	30 - 3000K 40 - 4000K 50 - 5000K	T5 - Type V Wide	UNV - 120-277V	BZ - Bronze BK - Black CS - Custom**	ND - Non Dim DM - 0-10V Dim	SP - 20kA Surge Protection 120-277VAC PC - Photocell EM - Emergency Driver Provides 90 Minutes of Backup



Vivid Leds, Inc.
PO BOX 9
Sellersburg, IN 47172
330-809-0431
www.vividleds.us

Dimensions, specifications, and product pictures are subject to change without notice.

The product on this page is a manufactured to order, non-stocking item. This product cannot be returned for refund or credit.

D20

Revised 4.28.24