

## Product Description

Alume WP LED half cutoff wall pack is designed to replace traditional MH / HPS wall packs using well sealed die-cast aluminum housings and glass lenses. The Alume is easy to install and has a dimming function available. Replace your MH / HPS wall packs up to 600W with the latest technology in lighting - the Alume WPG!

> Quick Ship - In Stock, Ready to Ship


Project:		Type:
Location:		
Prepared By:		Date:
Comments:		

## Performance Summary

- Energy-efficient Philips Lumileds SMD LEDs with high efficacy >130 Lm/W
- In stock and ships from several U.S. locations for quick delivery
- Better visibility than HID or fluorescent with crisp, white light
- Open frame design with Type V IES beam angle
- Easy access to control switch for a range of CCT's from 3500K to 5000K
- Wattage selectable switch allows for a wide range of lumen outputs
- Patented design with high quality components, excellent choice for retrofitting
- National listing lab tested to IES standard
- High lumen maintenance exceeds DOE requirements
- Solid State with high-shock and vibration resistance
- Aviation grade aluminum alloy die cast housing with bronze powdercoat finish
- Chromate conversion coating for long lasting appearance
- Streamlined housing, no rough edges or scraping, with 304 stainless steel hardware
- Housing and driver compartment is one piece to maximize heat dissipation
- 1/9th LED micro color binning enables tight color control
- Hot color targeting ensures color is within ANSI bin compliance
- Well distributed light using a patented reflecting system
- CNC machined LED boards are flatness controlled to 0.1mm to speed up heat dissipation
- Impact resistant glass lens over the LEDs with rubber grommet
- Advanced, serviceable, constant current Sosen driver
- High power factor with IC controlled LED circuits and low THD driver
- Low junction temperature for long life and low lumen depreciation
- Instant illumination and restrike with no warm up or cold start issues
- Contains no mercury, lead, infrared or UV radiation and cool to the touch
- Commercial CRI: RA>70
- Operating temperature: -40 to 40 degrees celsius
- 100,000 hour LED life of maintenance-free, safe operation
- IP65 rated for indoor or outdoor locations
- Certifications: CE, RoHS,UL, cUL, DLC
- 10 year limited warranty

## Alume WP

Wattage Selectable & Color Tunable Half Cutoff Wall Pack  
LED Dimmable Luminaire

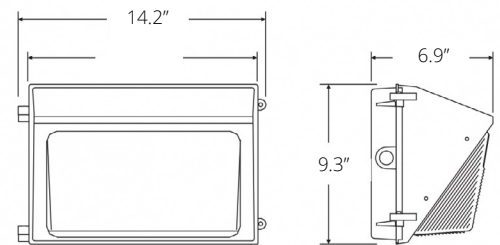

## Models:

- VDWPG100WS: 60W/80W/100W - 13000 Lm - 12 Lbs
- VDWPP120WS: 60W/80W/100W/120W - 15600 Lm - 12 Lbs

Ordering Information:				Part Number:			
* Adder Applies				Ordering Example: VDWPG100WS-CT-S4-UNV-BZ-DM-WM			
Family	CCT	Optic	Voltage	Finish	Dimming	Mounting	Accessories*
VDWPG100WS VDWPP120WS	CT - Color Tunable	S5 - Type V	UNV - 100-277V	BZ - Bronze	ND - No Dim DM - 0-10V Dim	WM - Wall Mount	PC - Photocell



Vivid Leds, Inc.  
PO BOX 9  
Sellersburg, IN 47172  
sales@vividleds.us  
www.vividleds.us

Dimensions, specifications, and product pictures are subject to change without notice.

Dimensional pictures are for reference only. They do not represent the actual fixture's shop drawing or design.

D5