

## Product Description

The Alume TP Triproof Linear Strip has a beautiful round tube design for commercial applications. This fixture combines the latest in LED technology with 130 Lm/W brightness, beautiful light distribution, a commercial grade optic lens, anti-corrosion paint, and surface mount brackets. Typical energy savings of 80% over traditional light sources. Ideal for replacing 80-200W MH/HPS.

> Quick Ship - In Stock, Ready to Ship


Project:		Type:
Location:		
Prepared By:		Date:
Comments:		

## Performance Summary

- Philips Lumileds 3030 LEDs with high efficacy >130 Lm/W
- Standard design with modern components, excellent choice for retrofitting
- Surface mount design with detachable power cord whip
- Low profile, 3G vibration rated in a compact design
- Patented heat dissipation design for optimum efficiency
- Designed with precise tolerances for manufacturing considerations
- National listing lab tested to IES standards with Type V 120 degree beam angle
- High lumen maintenance exceeds DOE requirements
- 0-10V dimming option for enhanced control
- Solid State with high-shock and vibration resistance
- Smooth, non-glare and decorative with diffused lens
- Well distributed light using a patented reflecting system
- Effectively illuminates ambient light with superior foot candles
- Patented design with 0.8mm aluminum housing with excellent heat dissipation
- Durable casing with high purity AL6063 aluminum heatsink
- High quality Polystyrene cover with strong capacity
- Delicate shape, lightweight, easy installation
- Aluminum LED boards with copper tracings for best thermal management
- LED array manufactured using a state-of-the-art SMT machine
- Light engine is available in a 5000K (83 CRI) configuration
- Architectural white polyester powdercoat finish
- Chromate conversion coating for long lasting appearance
- Fast turn on with no warm up or cold start issues
- 1/9th micro color binning enables tight color control
- Hot color targeting ensures color is within ANSI bin compliance
- Universal 100-277V integral driver with surge protection
- Silent operation, no noise, no flickering
- Contains no mercury, lead, infrared or UV radiation and cool to the touch
- Operating temperature: -40 to 40 degrees C
- 100,000 hour LED life based on LM-80 results and TM-21 calculation
- Certifications: CE, RoHS, ETL, DLC - IP65 outdoor rated
- 10 year limited warranty

## Alume TP

Outdoor Rated Triproof Linear Strip  
LED Luminaire

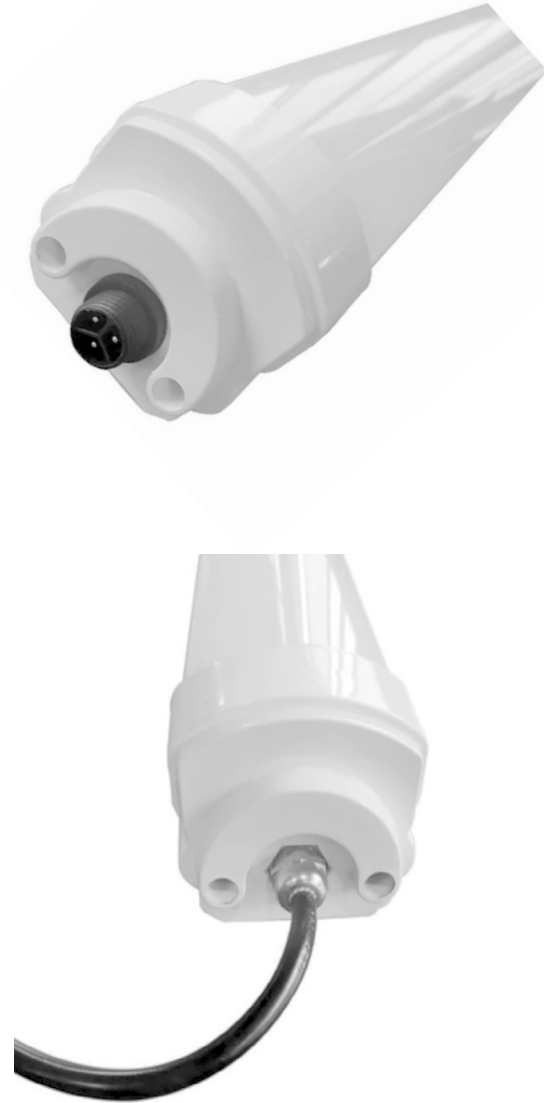

## Models:

- VWDTP40W4F - 4' - 40W - 5200 Lm - 48" (L) x 2.3" (H) x 2.4" (W) - 5 Lbs

<b>Ordering Information:</b>				Part Number:			
Ordering Example: VWDVP40W4F-50-V27-WT-DM-SM							
Family	CCT	Optic	Voltage	Finish	Dimming	Mounting	Accessories
VWDTP40W4F	50 - 5000K	DF - Diffused	V27 - 120-277V	WT - White	ND - Non Dim	SM - Surface Mount	



Vivid Leds, Inc.  
PO BOX 9  
Sellersburg, IN 47172  
330-809-0431  
www.vividleds.us

Dimensions, specifications, and product pictures are subject to change without notice.