

## Product Description

The Alume Straight Square Steel poles are built from high strength steel tube and are available side drilled for arm mounted area lighting luminaires or with tenon mounts for flood and post top luminaires. Typical area lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting heights of 10' to 30'.

> Quick Ship - In Stock, Ready to Ship


Project:		Type:
Location:		
Prepared By:		Date:
Comments:		

## Performance Summary

- Dallas, TX and Temecula, CA warehoused product with same day shipping
- Standard length poles Include 2 3/8" OD vertical tenon
- Polycarbonate top cover and hole plugs for unused drilling locations
- Poles are pre-drilled for side mount
- Drill templates available for a variety of luminaire mounting options
- Die cast aluminum reinforced cast iron hand-hole and cover with ground screw
- Anchor bolts are Included and sized based on selected pole size
- Pole includes a two-piece formed steel base cover
- Base cover is easily assembled and fitted over pole base
- Conforms to ASTM-A 500 Grade B: minimum yield strength of 46,000 PSI
- Galvanized steel with 11 gauge (.120") wall thickness
- Textured architectural polyester powdercoat finish
- Baked to ensure maximum paint adhesion, hardness and durability
- Custom length pole height cutting is available
- Paint matched pole accessories are available

## ALUME SQUARE

Straight 4" Square Steel Poles

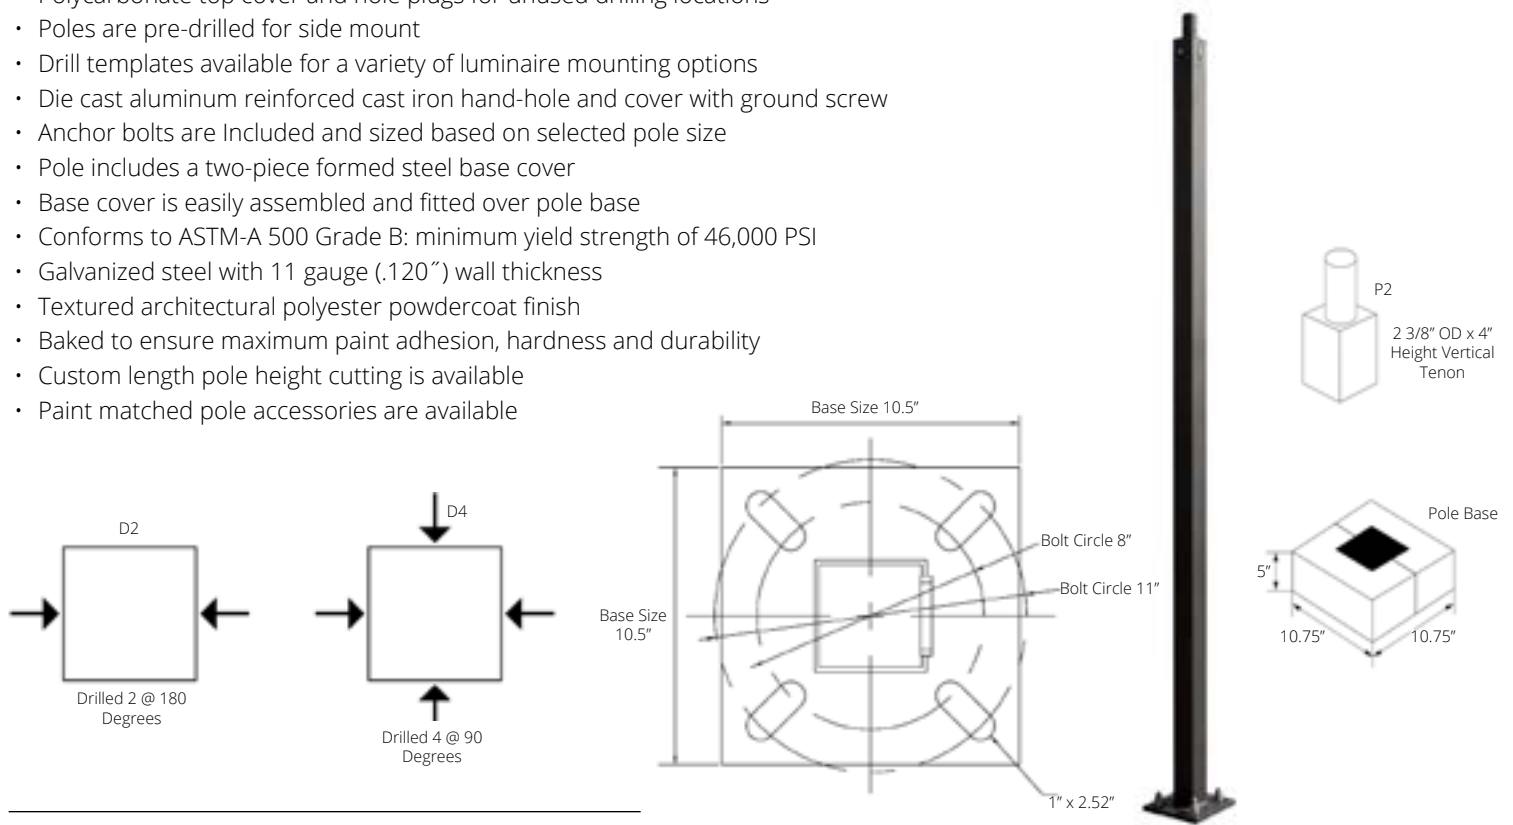

## Models:

- WDP20F4NSQ: Up to 20 foot, 4 inch square, 11 gauge pole, 8"-9" bolt circle, 10.5" base size, 3/4" base thickness, 4" bolt projection
- WDP25F4NSQ: Up to 25 foot, 4 inch square, 11 gauge pole, 8"-9" bolt circle, 10.5" base size, 3/4" base thickness, 4" bolt projection
- WDP30F5NSQ: Up to 30 foot, 5 inch square, 10 gauge pole, 10"-11" bolt circle, 11" base size, 1" base thickness, 4" bolt projection

Ordering Information:				Part Number:	
*Adder Applies. Extended Lead Time Applies.				Ordering Example: WDP20F4NSQ-20-BZ-P2-NO	
Family	Pole Height	Housing Finish	Pole Top Mounting	Options	Accessories
WDP20F4NSQ WDP25F4NSQ WDP30F5NSQ	10 - 10 Foot* 12 - 12 Foot* 14 - 14 Foot* 16 - 16 Foot* 18 - 18 Foot* 20 - 20 Foot 25 - 25 Foot 30 - 30 Foot CS - Custom*	BZ - Bronze CS - Custom*	D2 - Drilled 2 Sides at 180 Degrees with Plugs D4 - Drilled 4 Sides at 90 Degrees with Plugs P2 - 2 3/8" OD x 4" Height Vertical Tenon P3 - 2 7/8" OD x 3" Height Vertical Tenon	NO - No Options LAB - Less Anchor Bolts LBC - Less Base Cover	SEE NEXT PAGE



Vivid Leds, Inc.  
PO BOX 9  
Sellersburg, IN 47172  
800-974-3570  
www.vividleds.us

Dimensions, specifications, and product pictures are subject to change without notice.

The product on this page is a manufactured to order, non-stocking item. This product cannot be returned for refund or credit.

021

Revised 5.9.25

## EPA:

**Wind Loading and Dimensional Data:**

Pole Description		80 MPH		90 MPH		100 MPH		110 MPH		120 MPH		130 MPH		140 MPH		150 MPH		Structure Weight (lbs.)
Shaft Size & Wall Thickness	Mounting Height	Max EPA (SQ FT)	Max Weight (LBS)	Max EPA (SQ FT)	Max Weight (LBS)	Max EPA (SQ FT)	Max Weight (LBS)	Max EPA (SQ FT)	Max Weight (LBS)	Max EPA (SQ FT)	Max Weight (LBS)	Max EPA (SQ FT)	Max Weight (LBS)	Max EPA (SQ FT)	Max Weight (LBS)	Max EPA (SQ FT)	Max Weight (LBS)	
4" Square, 11 Gauge	10' - 0"	30.6	765	20.0	500.0	16.0	400.0	13.0	325.0	10.5	263.0	8.5	213.0	7.0	175.0	6.0	150.0	73
	12' - 0"	24.4	610	16.0	400.0	13.0	325.0	10.0	250.0	8.0	200.0	6.5	163.0	5.0	125.0	4.0	100.0	88
	14' - 0"	19.9	496	13.5	338.0	10.0	250.0	7.5	188.0	6.0	150.0	4.5	113.0	3.5	88.0	2.5	63.0	102
	16' - 0"	15.9	398	10.5	263.0	7.5	188.0	5.5	138.0	4.0	100.0	3.0	75.0	1.5	38.0	1.0	25.0	117
	18' - 0"	12.6	315	8.0	200.0	5.5	138.0	4.0	100.0	2.5	63.0	1.5	38.0	0.5	13.0	-	-	131
	20' - 0"	9.6	240	6.0	150.0	4.0	100.0	2.5	63.0	1.0	25.0	-	-	-	-	-	-	146

**NOTES:**

- Maximum EPA (Effective Projected Area) and weight values are based on AASHTO 2013 (90-150MPH) and AASHTO 2008 (80MPH)
- Consult factory on loading criteria for pole top mounted luminaires and/or brackets
- Variations from sizes above are available upon inquiry at the factory
- Satisfactory performance of poles is dependent upon the pole properly attached to a supporting foundation of adequate design
- Structure weight is a nominal value which includes the pole shaft and base plate only
- Side drilled poles include polycarbonate pole cap
- All poles include anchor bolts standard, consult dimension table for size based on pole dimensions
- All poles include square 2-piece bronze base cover
- Pole accessories listed below use their own part number
- Pole accessories are field installed
- Pole accessories color match the bronze pole



Vivid Leds, Inc.  
PO BOX 9  
Sellersburg, IN 47172  
800-974-3570  
www.vividleds.us

Dimensions, specifications, and product pictures are subject to change without notice.

## Accessories for 4" Straight Square Steel Pole:

<b>VVDPTSB1SZ</b> - Single Spoke Bracket, fits P2 Tenon 	<b>VVDPTSB290SZ</b> - Twin Spoke Bracket, 90 Degree Arms, fits P2 Tenon 	<b>VVDPTSB2180SZ</b> - Twin Spoke Bracket, 180 Degree Arms, fits P2 Tenon 
<b>VVDPTSB390SZ</b> - Triple Spoke Bracket, 90 Degree Arms, fits P2 Tenon 	<b>VVDPTSB3120SZ</b> - Triple Spoke Bracket, 120 Degree Arms, fits P2 Tenon 	<b>VVDPTSB490SZ</b> - Quad Spoke Bracket, 90 Degree Arms, fits P2 Tenon 
<b>VVDPRSTR180BHZ</b> - 180 Degree Triple Bullhorn, 30 1/4" Span between mounting points, fits P2 Tenon 	<b>VVDPRSQ180BHZ</b> - 180 Degree Quad Bullhorn, 30 1/4" Span between mounting points, fits P2 Tenon 	<b>VVDPRSD180BHZ</b> - 180 Degree Double Bullhorn, 42 7/8" Span between mounting points, fits P2 Tenon 
<b>VVDPSS4TRVTZ</b> - Triple Square Vertical Tenon, 26" Span between mounting points, fits P2 Tenon 	<b>VVDPSS4Q180VTZ</b> - Quad Square Vertical Tenon, 180 Degree, 26" Span between mounting points, fits P2 Tenon 	<b>VVDPSS4Q0VTZ</b> - Quad Square Vertical Tenon, 90 Degree, 26" Span between mounting points, fits P2 Tenon 
<b>VVDPSS4TVTZ</b> - Twin Square Vertical Tenon, 26" Span between mounting points, fits P2 Tenon 	<b>VVDPSS4T180HTZ</b> - Twin Square Horizontal Tenon, 180 Degree 	<b>VVDPSS4T90HTZ</b> - Twin Square Horizontal Tenon, 90 Degree 
<b>VVDPSS4TR90HTZ</b> - Triple Square Horizontal Tenon, 90 Degree 	<b>VVDPSS4Q90HTZ</b> - Quad Square Horizontal Tenon, 90 Degree 	<b>VVDPRSWMBZ</b> - Wall Mount Bracket 

## Accessories for 5" Straight Square Steel Pole:

<b>VVDPTSB1SZ</b> - Single Spoke Bracket, fits P2 Tenon 	<b>VVDPTSB290SZ</b> - Twin Spoke Bracket, 90 Degree Arms, fits P2 Tenon 	<b>VVDPTSB2180SZ</b> - Twin Spoke Bracket, 180 Degree Arms, fits P2 Tenon 
<b>VVDPTSB390SZ</b> - Triple Spoke Bracket, 90 Degree Arms, fits P2 Tenon 	<b>VVDPTSB3120SZ</b> - Triple Spoke Bracket, 120 Degree Arms, fits P2 Tenon 	<b>VVDPTSB490SZ</b> - Quad Spoke Bracket, 90 Degree Arms, fits P2 Tenon 
<b>VVDPRSTR180BHZ</b> - 180 Degree Triple Bullhorn, 30 1/4" Span between mounting points, fits P2 Tenon 	<b>VVDPRSQ180BHZ</b> - 180 Degree Quad Bullhorn, 30 1/4" Span between mounting points, fits P2 Tenon 	<b>VVDPRSD180BHZ</b> - 180 Degree Double Bullhorn, 42 7/8" Span between mounting points, fits P2 Tenon 
<b>VVDPSS5TRVTZ</b> - Triple Square Vertical Tenon, 26" Span between mounting points, fits P2 Tenon 	<b>VVDPSS5TVTZ</b> - Twin Square Vertical Tenon, 26" Span between mounting points, fits P2 Tenon 	<b>VVDPSS5Q0VTZ</b> - Quad Square Vertical Tenon, 90 Degree, 26" Span between mounting points, fits P2 Tenon 
<b>VVDPRSWMBZ</b> - Wall Mount Bracket 	<b>VVDPSS5T180HTZ</b> - Twin Square Horizontal Tenon, 180 Degree 	<b>VVDPSS5T90HTZ</b> - Twin Square Horizontal Tenon, 90 Degree 
<b>VVDPRSWMB90Z</b> - Wall Mount Bracket, 90 Degrees 	<b>VVDPTASUNVZ</b> - Pole Tenon Adapter 	<b>VVDPSS5SVTZ</b> - (P2) Single Square Vertical Tenon, 4" Height 