

Product Description

This LED exit sign is a dependable emergency lighting solution designed to meet safety and compliance requirements in commercial and industrial areas. For certifications, the included red and green inserts aide in sign visibility while the switch inside the light allows for personalized color selection. Increase versatility with the extra faceplate for double-sided signage or remove the arrows to point to the exit direction. It is crafted from flame-retardant thermoplastic with a charge indicator and test button.

> Quick Ship - In Stock, Ready to Ship


Project:		Type:
Location:		
Prepared By:		Date:
Comments:		

Performance Summary

- Energy-efficient, ultra bright, long life, red or green Samsung LEDs
- Low operating costs and no maintenance
- In stock and ships from several U.S. locations for quick delivery
- Better visibility and longer life than incandescent
- High quality components, excellent choice for retrofitting
- Corrosion resistant enclosure with one piece design
- Injection-molded thermoplastic ABS housing in white finish
- Housing is Impact and scratch resistant
- Mount multiple ways to ceiling or wall with included bracket
- Cutout on backside to mount directly to a wall
- Double waterproofing design to prevent condensation
- UL-94V-0 flame rating, fire-resistant
- Power consumption: 4W max, output: 1W max
- 1.2V long-life, maintenance-free, rechargeable NiCd battery
- Battery discharge time: 90 minutes
- Fully automatic solid-state charger initiates battery to complete recharge in 24 hours
- Contains no mercury, lead, infrared or UV radiation and cool to the touch
- High power factor with IC controlled LED circuits and low THD driver
- Low junction temperature for long life and low lumen depreciation
- Instant illumination and restrike with no warm up or cold start issues
- Solid State with high-shock and vibration resistance
- Patented heat dissipation design for optimum efficiency
- Dual Driver, 120/277V, 50/60Hz
- Operating temperature: 0 to 40 degrees celsius
- IP20 rated for indoor use
- Certifications: CE, RoHS, UL, cUL
- 100,000 hour LED life
- 5 year limited warranty (Excludes Battery)

Alume Sign

LED Exit Sign

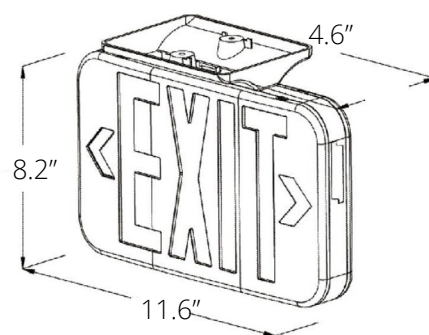

Models:

- VDLSES037R - Red Letters
- VDLSES037G - Green Letters

Ordering Information:

Ordering Information:						Part Number:
						Ordering Example: VDLSES037R-R-1-EM-W-WB
Family	Letters	Number of Faces	Voltage/Battery	Housing	Mounting	
VDLSES037R VDLSES037G	R - Red G - Green	1 - Single Face 2 - Double Face	EM - NiCd 90 Minutes - Dual Circuit with 120V/277V Input	W - White	WB - Wall Bracket	



Vivid Leds, Inc.
PO BOX 9
Sellersburg, IN 47172
330-809-0431
www.vividleds.us

Dimensions, specifications, and
product pictures are subject to
change without notice.