

Product Description

The Twilight X2 delivers quality and performance at an affordable price. Utilizing the latest CREE XPE LEDs, the luminaire offers an exceptional efficacy with accurate color projection. Whether you need to replace your existing architectural lighting or install for new construction, Vivid Leds can help you deliver a perfect solution. There are many accessories available to complete the job from start to finish.

> Special Order - Minimum 30 Day Lead Time

Project:		Type:
Location:		
Prepared By:		Date:
Comments:		

Performance Summary

- CREE XPE LEDS with RGB efficacy >35 Lm/W and white >80 Lm/W**
- Incredible light throw with 5 degree optic lens up to 325 feet
- Provides rich atmosphere with excellent color rendering
- Solid state with high shock and vibration resistance
- Precise optics with photometric lens built over each LED
- Easy installation and aiming with detachable rotating yoke bracket
- Includes mounting bracket with set and adjust screw positions & optional spike
- 180 degree bracket rotation for ground or wall mounting
- DMX / RDM integrated into the fixture
- Static color or white option dimming and on/off control requires DMX / RDM
- RGB or RGBW color changing modes by DMX / RDM controller
- High vertical illuminance for large space lighting
- Extruded 6063 aluminum alloy housing with silver finish and 4cm cooling ribs
- Durable 4mm tempered glass cover with water resistant protection
- Pure aluminum 1.6" depth heatsinks improve thermal property
- Corrosion resistant, durable, with high efficiency
- Optional snoots available along with a decorative housing for up/down applications
- 5' power cord whip & 1.5' in and out IP68 DMX cables included
- Operating temperature: -20 to 40 degrees celsius
- IP65 rated for outdoor applications
- Universal voltage: 100-240 VAC
- 100,000 hour LED life
- Certifications: CE, RoHS, ETL
- 1 Year Warranty - 3 Year Optional


TWILIGHT X2

Static Color, Static White, RGB, RGBW Color Changing
LED DMX Stripe, Spot or Graze



Models:

- VVDX26RGBW: 6 LEDS - 20W - 7.7" x 7.1" - 6.8 Lbs - RGBW
- VVDX29RGB: 9 LEDS - 20W - 7.7" x 7.1" - 6.8 Lbs - RGB
- VVDX29S: 9 LEDS - 20W - 7.7" x 7.1" - 6.8 Lbs - Static color or white
- VVDX212RGBW: 12 LEDS - 40W - 8.9" x 8.7" - 9.9 Lbs - RGBW
- VVDX218RGB: 18 LEDS - 40W - 8.9" x 8.7" - 9.9 Lbs - RGB
- VVDX218S: 18 LEDS - 40W - 8.9" x 8.7" - 9.9 Lbs - Static color or white

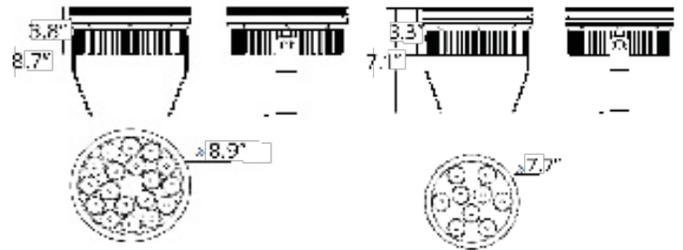

Ordering Information:

*Adder Applies				Part Number:	Ordering Example: VVDX29RGB-W-10-UNV-SG-YK	
Family	CCT	Optic	Voltage	Finish	Mounting	Accessories*
VVDX26RGBW VVDX29RGB VVDX29S VVDX212RGBW VVDX218RGB VVDX218S	RGB - RGB Color Changing RGBW1 - RGBW 3000K RGBW2 - RGBW 4000K RGBW3 - RGBW 6000K W - Static White - 3000K N - Static White - 4000K C - Static White - 6000K R - Static Red - 625nm G - Static Green - 525nm B - Static Blue - 460nm Y - Static Yellow/Amber - 590nm	5 - 5 Degree 10 - 10 Degree 20 - 20 Degree 40 - 40 Degree 60 - 60 Degree	UNV - 100-240V	SG - Silver Gray BK - Black CS - Custom*	YK - Yoke Bracket SP - Spike - 2.4" (D) x 10.5" (H)*	HS - Half Shield Snoot FS - Full Shield Snoot HH - Up/Down Housing DM - Static DMX Dim DMX Cables DMX Controllers Wireless DMX Signal Amplifiers Waterproof Connectors

**80 Lm/W is based on 6000K white CCT. Static color or RGB LEDS > 35 Lm/W.



Vivid Leds, Inc.
PO BOX 9
Sellersburg, IN 47172
330-809-0431
www.vividleds.us

Dimensions, specifications, and product pictures are subject to change without notice.

The product on this page is a manufactured to order, non-stocking item. This product cannot be returned for refund or credit.

J2

Revised 2.27.26