

Product Description

The Alume HPT historic post top LED luminaire features a beautiful historic design that combines elegance with high-performance lighting. This lantern-style fixture is an ideal choice for enhancing your landscape. Built to fit poles up to 3 inches in diameter, it's perfect for a wide range of installations. With its durable IP65 rated design and energy-efficient output, this light is the perfect blend of style, reliability, and function. The Alume HPT is perfect for gardens, walkways, parks, residential or landscapes.

> Quick Ship - In Stock, Ready to Ship


Project:		Type:
Location:		
Prepared By:		Date:
Comments:		

Performance Summary

- Energy-efficient Philips Lumileds SMD LEDs with high efficacy >100 Lm/W
- In stock and ships from several U.S. locations for quick delivery
- Easy access to control switch for a range of CCT's from 3000K to 5000K
- Patented design with high quality components, excellent choice for retrofitting
- Wattage selectable switch allows for a wide range of lumen outputs
- National listing lab tested to IES standards with a 120 degree optic
- High lumen maintenance exceeds DOE requirements
- Solid State with high-shock and vibration resistance
- 1/9th LED micro color binning enables tight color control
- Heavy grade die cast aluminum housing with professional black powdercoat finish
- Housing is sandblasted and polished for corrosion resistance, rust free and fadeless
- Streamlined housing, no rough edges or scraping, with SUS316 stainless steel hardware
- Housing and driver compartment is one piece to maximize heat dissipation
- CNC machined LED boards are flatness controlled to 0.1mm to speed up heat dissipation
- Copper condensation valve balances the air pressure and prevents water vapor accumulation
- Anti-glare diffused glass lens
- Well distributed light using a patented reflecting system
- Round pole 3 inch diameter mounting
- Patented double waterproofing design on the radiator and module to prevent condensation
- Advanced constant current Sosen 0-10V dimming power supply
- No UV or RF interference, silent operation, no noise, no flickering
- Fast turn on with no warm up or cold start issues
- High power factor with IC controlled LED circuits and low THD driver
- Low junction temperature for long life and low lumen depreciation
- Instant illumination and restrike with no warm up or cold start issues
- Contains no mercury, lead, infrared or UV radiation and cool to the touch
- Commercial CRI: RA>72
- Operating temperature: -20 to 45 degrees celsius
- 100,000 hour LED life - IP65 rated for outdoor locations
- Certifications: CE, RoHS, FCC, UL, cULus, DLC
- 10 year limited warranty

Alume HPT

Wattage Selectable & Color Tunable Historic Post Top
LED Luminaire

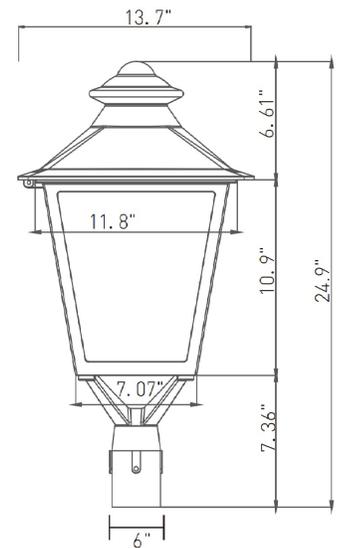

Models:

- VDLPT30 - 30W/50W/60W - 6000 Lm - 3000K/4000K/5000K - 22 Lbs
- VDLPT80 - 80W/100W/120W - 12000 Lm - 3000K/4000K/5000K - 22 Lbs

Ordering Information:				Part Number:		
Ordering Example: VDLPT30-CT-T5-V27-BK-PM-DM						
Family	CCT	Optic	Voltage	Finish	Mounting	Dimming
VDLPT30 VDLPT80	CT - Color Tunable	T5 - 120 Degrees	V27 - 120-277V	BK - Black	PM - Pole Top Mount	DM - 0-10V Dimming



Vivid Leds, Inc.
PO BOX 9
Sellersburg, IN 47172
330-809-0431
www.vividleds.us

Dimensions, specifications, and product pictures are subject to change without notice.

A7