ALUME HALF MOON

⚠ WARNING

PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION

SAFETY: This fixture must be wired in accordance with the national electrical code and applicable local codes and ordinances. Proper grounding is required to insure personal safety. Carefully observe the grounding procedure under installation section. All work should be done by a qualified electrician.
> RISK OF ELECTRIC SHOCK - Disconnect power at fuse or circuit breaker before installing or servicing.
> RISK OF PERSONAL INJURY - Fixture may become damaged and/or unstable if not installed properly. Tighten all fixture components to their recommended torque values.

WARNING: Make certain power is **OFF** before starting installation or attempting any maintenance.
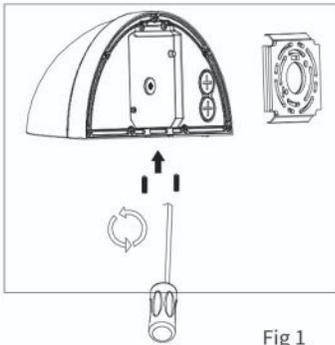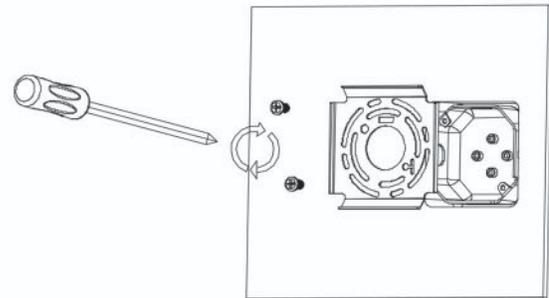
INSTALLATION

Fig 1

1. Use the Hex Wrench to loose the 2 Allen Screws. And take apart the mounting bracket from the fixture.

Fig 2

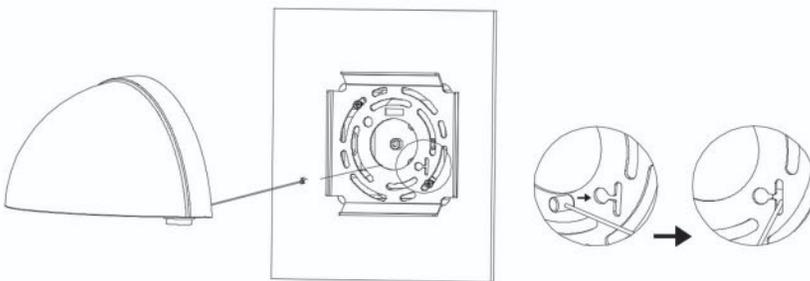2. Install the mounting bracket to the junction box.

Fig 3

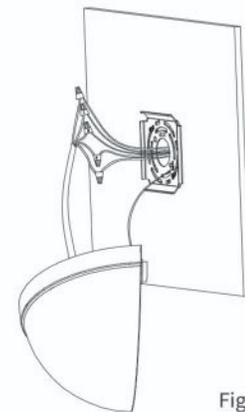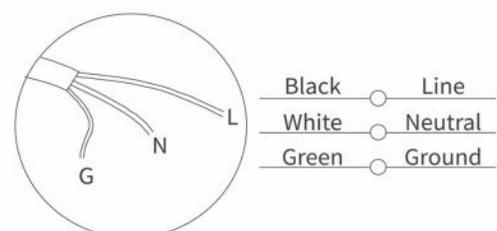3. Attach the safety cable to the bracket to hold the fixture onto the wall.

Fig 4

4. Connect wires according to below wire diagram.

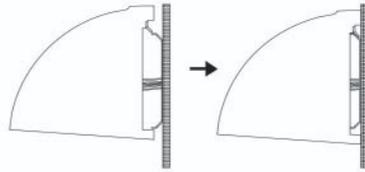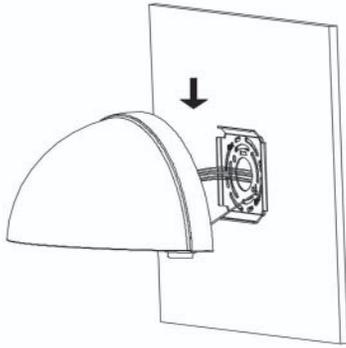|	
Black	Line
White	Neutral
Green	Ground

Fig 5

Fig 6

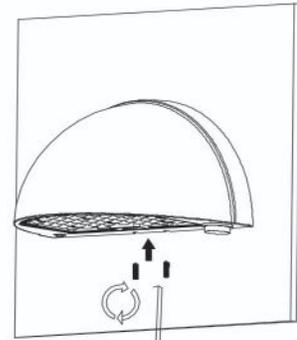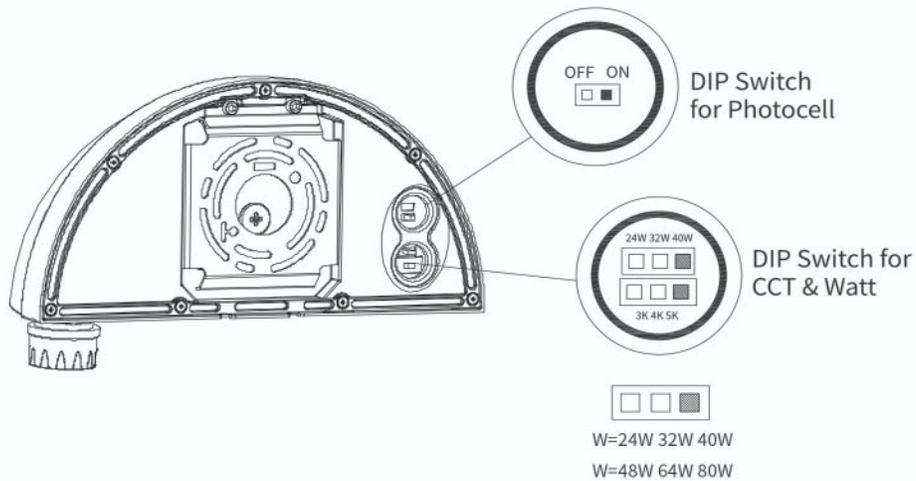5. Follow the arrow direction to slide the fixture onto the mounting bracket.

6. Tighten the 2 Allen Screws and installation is completed.

WATTAGE & CCT SELECTABLE GUIDANCE

Default Setting:
Watt: 40W/80W CCT: 5000K Photocell: ON

OFF   ON

DIP Switch for Photocell

24W 32W 40W

DIP Switch for CCT & Watt

3K 4K 5K

W=24W 32W 40W
W=48W 64W 80W