

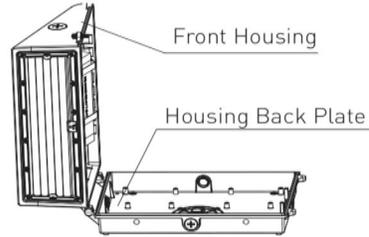


# ALUME WFC INSTRUCTION

1. Unscrew the Front Housing with a Phipps screwdriver by loosening (2) screws. Confirm junction box size and junction box mounting provisions to that of the light fixture.
2. Attach the light fixture to the junction box or mounting surface.
3. Attach the appropriate wires to the light fixture wires, green to green, black to black and white to white. Secure each wire pair with a wire nut. (Wiring instruction FYL.) The cable inlet needs to be waterproofed, such as applying waterproof glue.
4. Close the Front Housing and tighten screws (2 pcs) on the Front Housing

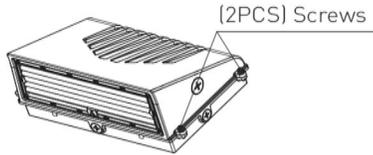

5. The bottom shell is sprayed with glue and tightly sealed to the wall. The fixture must be mounted on the wall with the lens facing down as shown in the picture. After the product is installed, remove the two drain hole plugs to prevent internal water accumulation.

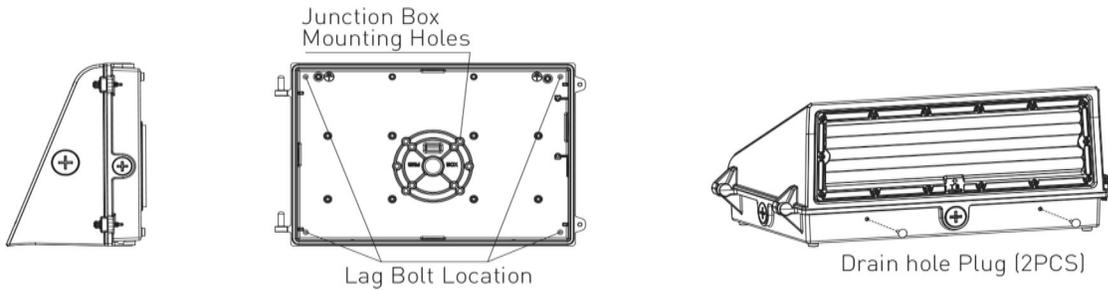

## FUNCTION ADJUSTMENT:

Follow the instructions below to change fixture Color Temperature (CCT, Power (W)) and/or Photocell On/Off option from the factory default settings before installation: Factory Default Settings: Max wattage, 5000K, Photocell/ON

1. Locate the Selector Switches on the side of the Housing as shown in the figure and remove the Selector Switch Cover Plug.
2. Sliding the respective switch to the desired value. Select Color Temperature (CCT, Power (W)), and/or Photocell On/Off position by
3. Replace the Selector Switch Cover Plug. Tighten the plug to prevent water.

