

Iris LX C1D1 Linear

Installation Instructions

Series I High Bay

Important

READ INSTRUCTIONS CAREFULLY BEFORE INSTALLING. KEEP THIS INSTRUCTIONS FOR FUTURE REFERENCE.

Fixtures must be wired in accordance with the National electrical code and all applicable local codes. Proper grounding is required for safety.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A QUALIFIED ELECTRICIAN WHO IS FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

Warning: Risk of fire or electric shock. High bay Light installation requires knowledge of luminaires and electrical systems. If not qualified, DO NOT try to install. Please contact an electrician.


Warning: Risk of fire or electric shock. Suitable for wet locations. Make sure the power is off premier to install.

Warning: Risk of fire or electric shock. Suitable for non-insulated surface and frame. DO NOT cover fixture with insulation liner or similar material.

Warning: DO NOT install in unstable, loose or breakable surfaces.


Warning: DO NOT let objects impact or exert force on the surface of the fixture.

Installation Steps (For Class I Div. 1 Group C, D locations)



⚠ WARNING

Risk of fire, Electric shock or personal injury
Before installation, turn off power!

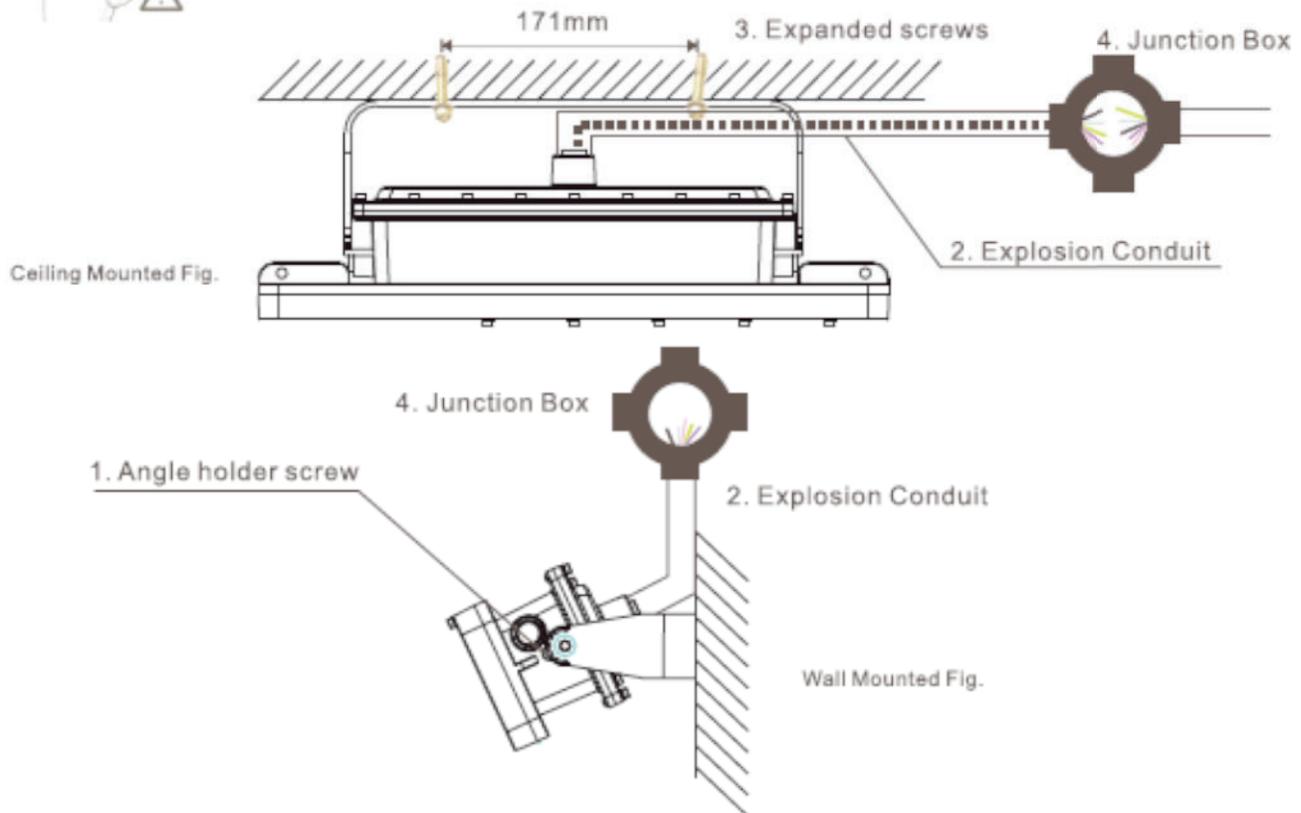

Installation Description


1. Take the fixture and accessory out from cartoon box, tighten 2x angle holder screws.

3. Drill 2x 10mm hole as the distance 171mm, fixing $\varnothing 18$ expanded screws and bracket on ceiling. (Please keep the lamp installation height as least 1.2 meter)


2. Through the cable to the explosion pipe and tighten the fixture with explosion pipe.

4. Connect the AC cable, Black cable joins to Live wire, white cable joins to Null wire, green cable joins to grounding. Dimming wiring: Purple cable to Dim+, pink cable to Dim-. (Please use a hazardous location joint box)


Ceiling mounting

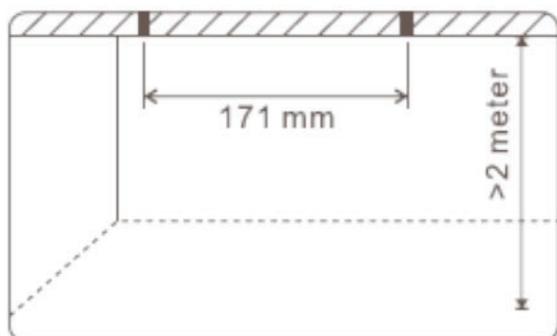


1. Drill 2x 18mm hole as the distance 171mm, fixing $\varnothing 18$ expanded screws and bracket on the ceiling. (Please keep the lamp installation height as least 2 meter)

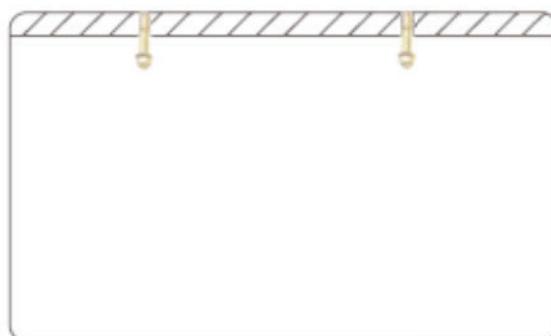


2. Fix the expanded screws to the ceiling.

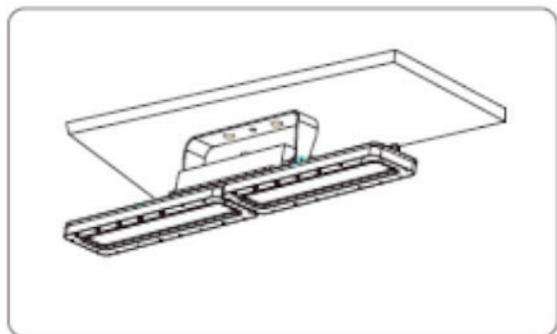


3. Match the hole with the expanded screws, and tighten the nuts as above picture.

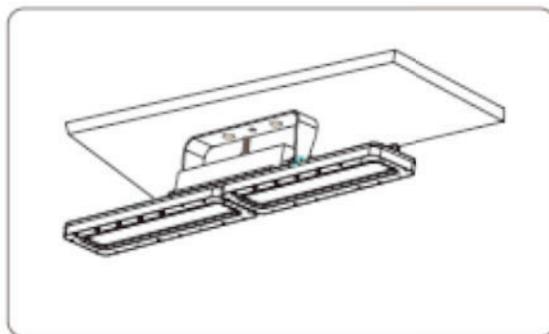


Wall mounting

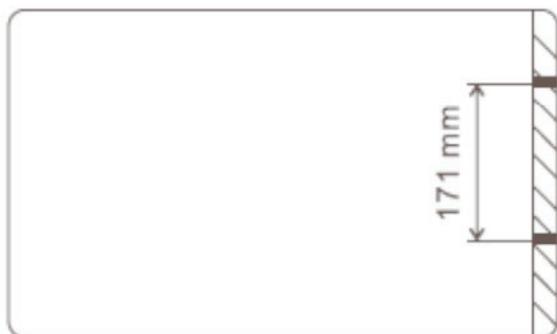

1. Drill 2x 18mm hole as the distance 171mm, fixing $\varnothing 18$ expanded screws and bracket on the wall. (Please keep the lamp installation height as least 2 meter)

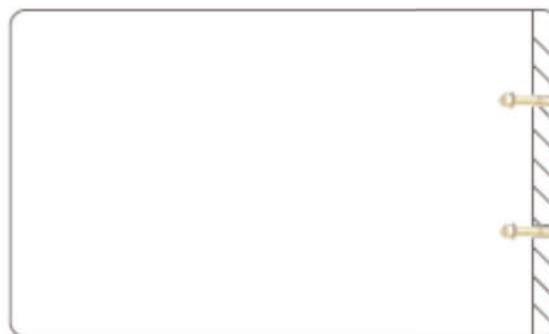

2. Fix the expanded screws to the wall.



3. Match the hole with the expanded screws, and tighten the nuts as above picture.

