

# IRIS PRO C HIGH BAY

## Installation Instructions

### Important

READ INSTRUCTIONS CAREFULLY BEFORE INSTALLING. KEEP THIS INSTRUCTIONS FOR FUTURE REFERENCE

Fixtures must be wired in accordance with the National electrical code and all applicable local codes. Proper grounding is required for safety.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A QUALIFIED ELECTRICIAN WHO IS FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

**WARNING:** Risk of fire or electric shock. High bay Light installation requires knowledge of luminaires and electrical systems. If not qualified, DO NOT try to install. Please contact an electrician.


**WARNING:** Risk of fire or electric shock. Suitable for wet locations. Make sure the power is off prior to install.

**WARNING:** Risk of fire or electric shock. Suitable for non-insulated surface and frame. DO NOT cover fixture with insulation liner or similar material.

**WARNING:** DO NOT install in unstable, loose or breakable surfaces.

**WARNING:** DO NOT let objects impact or exert force on the surface of the fixture.

### Installation and Electrical Connection




#### **! WARNING**

#### **RISK OF FIRE, ELECTRIC SHOCK OR PERSONAL INJURY**

Before installation, turn power off.


**1**

The specific steps of installation (Hook ring, With the sensor)

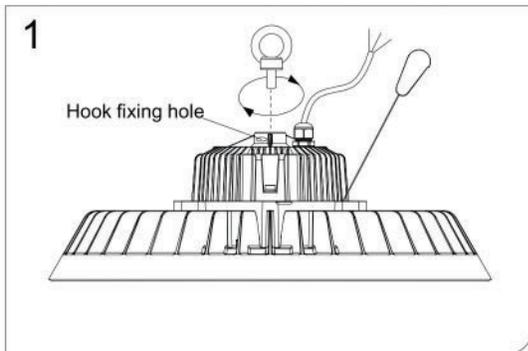


1. Take the fixture and hook ring out from cartoon box, tighten hook as arrow, fixed the hook screw.

**2**

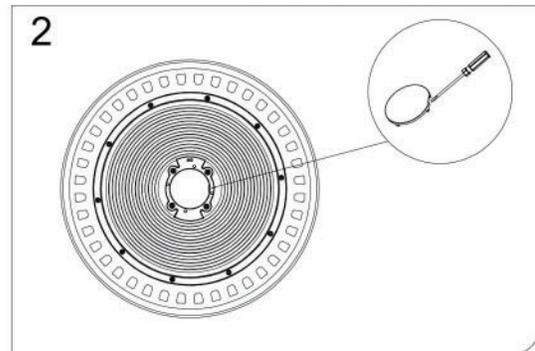


2. Use a flat-head screwdriver to open the lid

**3**

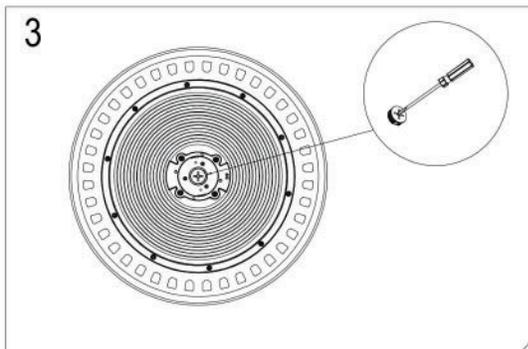


3. Remove the plug using a flat-head screwdriver.

**4**

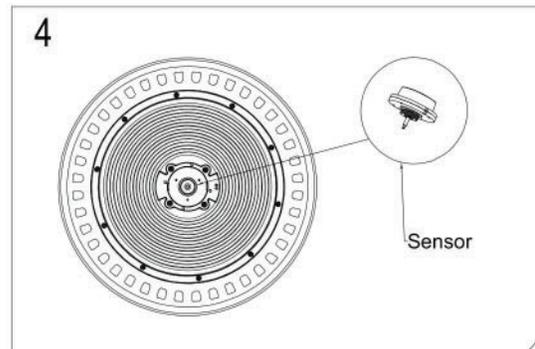


4. Locate the sensor, align it with the middle hole, turn it clockwise and tighten it

## Installation and Electrical Connection

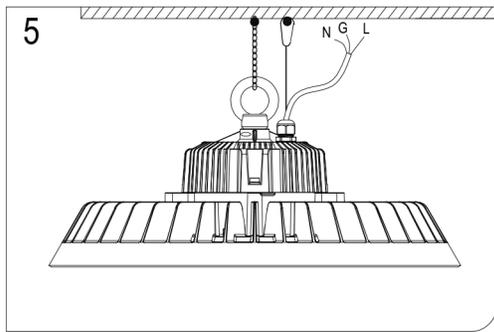

5. Connect chain and safety wire to the installation location, adjust the lamp high and level.

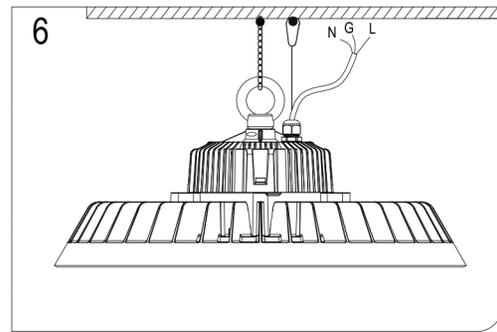


6. Connect the AC cable, L for the fire line, N for the zero line, G for the ground line, Adjust the light by positive and negative pole butt can.


7. After the installation of the whole lamp, it can be powered on




### The specific steps of installation (Angle holder type)

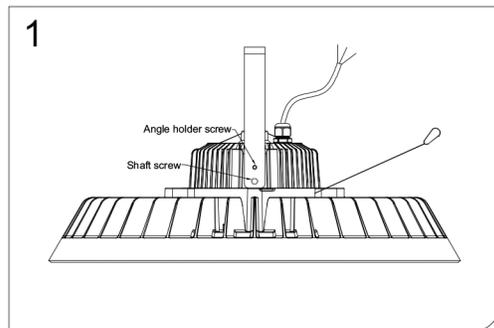


1. Take the fixture and hook ring out from cartoon box, tighten hook as arrow, fixed the hook screw.

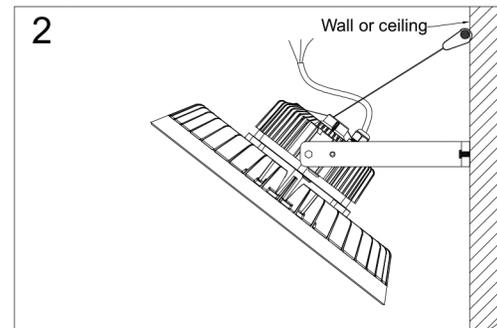


2. Connect chain and safety wire to the installation location, adjust the lamp high and level.

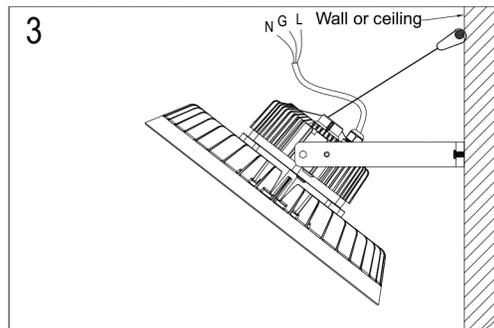


3. Connect the AC cable, Black cable joins to L, white cable joins to N, green and yellow cable joins to grounding, Adjust the light by positive and negative pole butt can

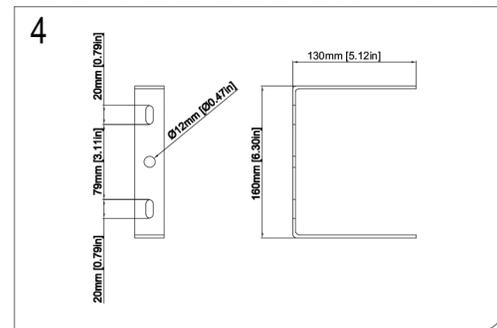

4. 100W bracket size (as shown in the figure above) is drilled and installed according to this hole spacing

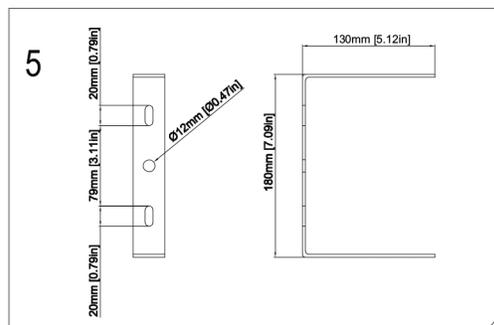

5. 150W-200W bracket size (as shown in the figure above) is drilled and installed according to this hole spacing

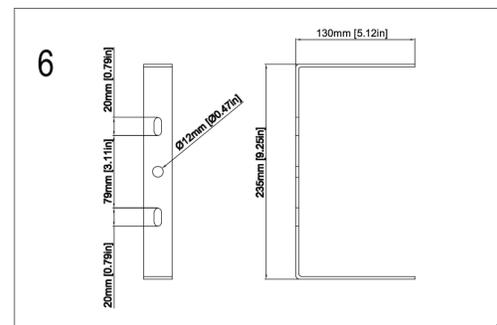

6. 300W bracket size (as shown in the figure above) is drilled and installed according to this hole spacing