Product Description

The Twilight X4 is the leader in the industry for an economical color changing luminaire. Sticking to the basics by using industry standard DMX protocal for control, to clever wiring, to internal self-control with built-in programs, the Twilight X4 offers a basic solution that applies to even the most difficult applications. With quality throughout, from the LEDS to the die-cast housing, the Twilight shines above the rest.
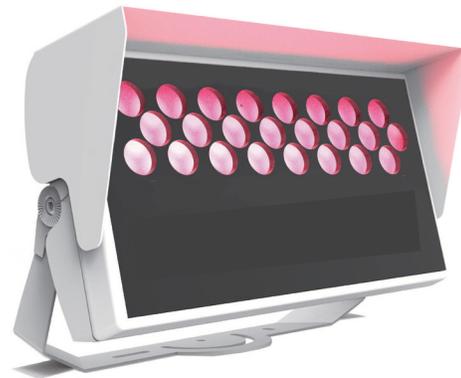
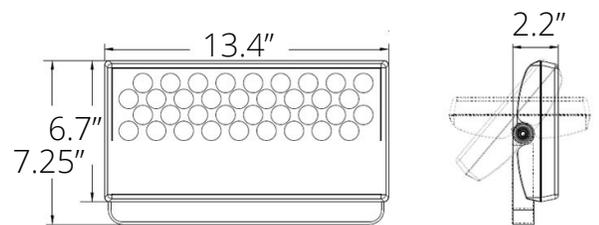| Project:		Type:
Location:		
Prepared By:		Date:
Comments:		

Performance Summary

- Edison LEDS with RGB efficacy >35 Lm/W and white >80 Lm/W**
- Incredible light throw with 15 degree optic lens
- Provides rich atmosphere with excellent color rendering
- Solid state with high shock and vibration resistance
- Precise optics with photometric lens built over each LED
- Easy installation and aiming with detachable rotating yoke bracket
- Includes mounting bracket with set and adjust screw positions
- 180 degree bracket rotation for ground or wall mounting
- DMX / RDM integrated into the fixture
- Static color or white option dimming and on/off control requires DMX / RDM
- RGB or RGBW color changing modes by DMX / RDM controller
- LED screen with push button control to change programs or setup DMX
- Built-in self-control with pre-programmed lighting effects
- Programs include solid colors, flashing, fading, color jumping
- High vertical illuminance for large space lighting
- Die-cast aluminum alloy white housing with low heat generation
- Durable polycarbonate clear cover with water resistant protection
- Pure aluminum 1.6" depth heatsinks improve thermal property
- Corrosion resistant, durable, with high efficiency
- 5' power cord whip & 1.5' in and out IP68 DMX cables included
- Contains no mercury or lead and cool to the touch
- Solid state with high shock and vibration resistance
- Operating temperature: -20 to 40 degrees celsius
- IP65 rated for outdoor applications
- 100,000 hour LED life
- Certifications: CE, RoHS, ETL
- 1 Year Warranty – 3 Year Optional

TWILIGHT X4

Static Color, Static White, RGB, RGBW Color Changing
LED DMX Wash, Stripe, Spot or Graze

Shown with Visor

Models:

- VVDX424RGBW: 24 LEDS - 48W - UNV2 - RGBW
- VVDX436RGB: 36 LEDS - 48W - UNV1 - RGB
- VVDX436S: 36 LEDS - 48W - UNV1 - Static color or white

13.4"   2.2"

6.7"
7.25"

Weight 9.5 Lbs

Ordering Information:

| Part Number: | |

*Adder Applies					Ordering Example: VVDX436RGB-RGB-10-UNV-WT-YK	
Family	**CCT**	**Optic**	**Voltage**	**Finish**	**Mounting**	**Accessories***
VVDX424RGBW VVDX436RGB VVDX436S	RGB - RGB Color Changing RGBW1 - RGBW 3000K RGBW2 - RGBW 4000K RGBW3 - RGBW 6000K W - Static White - 3000K N - Static White - 4000K C - Static White - 6000K R - Static Red - 625nm G - Static Green - 525nm B - Static Blue - 460nm Y - Static Yellow/Amber - 590nm	15 - 15 Degree 30 - 30 Degree 45 - 45 Degree	UNV1 - 100-240V UNV2 - 100-277V	WT - White CS - Custom*	YK - Yoke	GP - Field Installed Grounded Plug DM - Static DMX Dim VS - Visor DMX Cables DMX Controllers Wireless DMX Signal Amplifiers

ILLUMINATING YOUR GREEN FUTURE

**80 Lm/W is based on 6000K white CCT. Static color or RGB LEDS > 35 Lm/W.

J4

Revised 3.1.26