

## Product Description

The Twilight X6 is the leader in the industry for an economical color changing luminaire. Sticking to the basics by using industry standard DMX protocol for control, to clever wiring, to internal self-control with built-in programs, the Twilight X6 offers a basic solution that applies to even the most difficult applications. With quality throughout, from the LEDs to the die-cast housing, the Twilight shines above the rest.

> Special Order - Minimum 30 Day Lead Time

Project:		Type:
Location:		
Prepared By:		Date:
Comments:		

## Performance Summary


- Edison LEDs with RGB efficacy >35 Lm/W and white >80 Lm/W\*\*
- Incredible light throw with 5 degree optic lens up to 325 feet
- Provides rich atmosphere with excellent color rendering
- Precise optics with photometric lens built over each LED
- Easy installation and aiming with detachable rotating yoke bracket
- Includes mounting bracket with set and adjust screw positions
- 70 degree bracket rotation for ground or wall mounting
- DMX / RDM integrated into the fixture
- Static color or white option dimming and on/off control requires DMX / RDM
- RGB or RGBW color changing modes by DMX / RDM controller
- LED screen with push button control to change programs or setup DMX
- Built-in self-control with pre-programmed lighting effects
- Programs include solid colors, flashing, fading, color jumping
- Die-cast aluminum alloy silver housing with low heat generation
- Durable polycarbonate clear cover with water resistant protection
- Pure aluminum 1.6" depth heatsinks improve thermal property
- Corrosion resistant, durable, with high efficiency
- 5' power cord whip & 1.5' in and out IP68 DMX cables included
- Operating temperature: -20 to 40 degrees celsius
- IP65 rated for outdoor applications
- 100,000 hour LED life
- Certifications: CE, RoHS, ETL
- 1 Year Warranty – 3 Year Optional

## TWILIGHT X6

Static Color, Static White, RGB, RGBW Color Changing  
LED DMX Wash, Stripe, Spot or Graze



Weight 19/26 Lbs

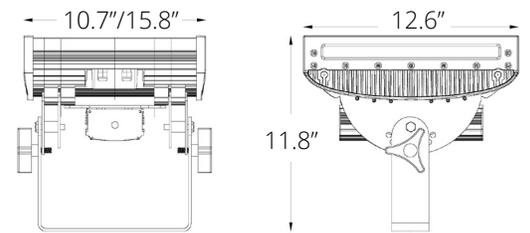

## Models:

- WDX626RGBW: 26 LEDs - 75W - 10.7" (W) - RGBW
- WDX636RGB: 36 LEDs - 75W - 10.7" (W) - RGB
- WDX636S: 36 LEDs - 75W - 10.7" (W) - Static color or white
- WDX652RGBW: 52 LEDs - 135W - 15.8" (W) - RGBW
- WDX672RGB: 72 LEDs - 135W - 15.8" (W) - RGB
- WDX672S: 72 LEDs - 135W - 15.8" (W) - Static color or white
- WDX640RGBW: 40 LEDs - 135W - 15.8" (W) - RGBW - 3 degree only

## Ordering Information:

					Part Number:	
*Adder Applies					Ordering Example: WDX672RGB-RGB-10-UNV-SG-GB	
Family	CCT	Optic	Voltage	Finish	Mounting	Accessories*
WDX626RGBW WDX636RGB WDX636S WDX652RGBW WDX672RGB WDX672S WDX640RGBW	RGB - RGB Color Changing RGBW1 - RGBW 3000K RGBW2 - RGBW 4300K RGBW3 - RGBW 6000K W - Static White - 3000K N - Static White - 4300K C - Static White - 6000K R - Static Red - 625nm G - Static Green - 525nm B - Static Blue - 460nm Y - Static Yellow/Amber - 590nm	3 - 3 Degree* 5 - 5 Degree* 10 - 10 Degree 20 - 20 Degree 45 - 45 Degree	UNV - 120 - 277V	SG - Silver Gray CS - Custom*	GB - Ground Base	GP - Field Installed Grounded Plug DM - Static DMX Dim  DMX Cables DMX Controllers Wireless DMX Signal Amplifiers



Vivid Leds, Inc.  
PO BOX 9  
Sellersburg, IN 47172  
330-809-0431  
www.vividleds.us

Dimensions, specifications, and product pictures are subject to change without notice.

\*\*80 Lm/W is based on 6000K white CCT. Static color or RGB LEDs > 35 Lm/W.

The product on this page is a manufactured to order, non-stocking item. This product cannot be returned for refund or credit.

J6

Revised 3.1.26