

Product Description

Alume WP LED semi cutoff wall pack is engineered to provide versatile and efficient outdoor illumination. It is designed to replace traditional MH / HPS wall packs using well sealed die-cast aluminum housing and your choice of a polycarbonate or glass lens. The Alume is easy to install with three clips. Replace your MH / HPS wall packs up to 400W with the latest technology in lighting - the Alume WP!

> Quick Ship - In Stock, Ready to Ship


Project:		Type:
Location:		
Prepared By:		Date:
Comments:		

Performance Summary

- High Brightness Philips Lumileds 2835 SMD LEDs with high efficacy >130 Lm/W
- In stock and ships from several U.S. locations for quick delivery
- Better visibility than HID or fluorescent with crisp, white light
- Open frame design with Type V IES 120 degree beam angle
- Easy access to control switch for a range of CCT's from 3500K/4000K/5000K
- Wattage selectable switch allows for a wide range of lumen outputs
- Patented design with high quality components, excellent choice for retrofitting
- National listing lab tested to IES standard
- High lumen maintenance exceeds DOE requirements
- Solid State with high-shock and vibration resistance
- Aviation grade aluminum alloy die cast housing with a powdercoat finish
- Chromate conversion coating for long lasting appearance
- Streamlined housing, no rough edges or scraping, with 304 stainless steel hardware
- Housing and driver compartment is one piece to maximize heat dissipation
- Easy installation and maintenance with three quick mount clips
- 1/9th LED micro color binning enables tight color control
- Hot color targeting ensures color is within ANSI bin compliance
- Well distributed light using a patented reflecting system
- CNC machined LED boards are flatness controlled to 0.1mm to speed up heat dissipator
- Choice of an impact resistant glass lens or a shatterproof polycarbonate lens
- Advanced, serviceable, constant current Sosen driver
- High power factor with IC controlled LED circuits and low THD driver
- Low junction temperature for long life and low lumen depreciation
- Instant illumination and restrike with no warm up or cold start issues
- Contains no mercury, lead, infrared or UV radiation and cool to the touch
- Commercial CRI: RA>70
- Operating temperature: -36 to 60 degrees celsius
- 100,000 hour LED life of maintenance-free, safe operation
- IP65 rated for indoor or outdoor locations
- Certifications: CE, RoHS,UL, cUL, DLC
- 10 year limited warranty

Alume WP

Power & CCT Selectable Semi Cutoff Wall Pack
LED Luminaire

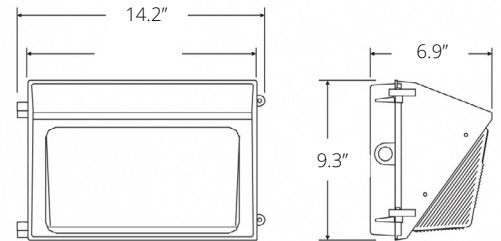

Models:

- VDWPP100WS: 60W/80W/100W - 7800 Lm to 13,000 Lm - 12 Lbs - White, PY Lens Only
- VDWPP120WS: 60W/80W/100W/120W - 7800 Lm to 15,600 Lm - 12 Lbs - Bronze Only

Ordering Information:				Part Number:			
* Adder Applies				Ordering Example: VDWPP120WS-CT-S5-UNV-BZ-GS-WM			
Family	CCT	Optic	Voltage	Finish	Lens Cover	Mounting	Accessories*
VDWPP100WA VDWPP120WS	CT - Color Tunable	S5 - Type V	UNV - 120-277V	BZ - Bronze WT - White	GS - Glass PY - Polycarbonate	WM - Wall Mount	PC - Photocell



Vivid Leds, Inc.
PO BOX 9
Sellersburg, IN 47172
sales@vividleds.us
www.vividleds.us

Dimensions, specifications, and product pictures are subject to change without notice.

Dimensional pictures are for reference only. They do not represent the actual fixture's shop drawing or design.

D3